

SHIRE

BUILT AROUND OUR REPUTATION



PLEASE NOTE

Wood is a natural product and is therefore prone to changes in appearance, including some warping, movement and splitting, particularly during unusual climatic conditions (long hot or wet spells of weather). As a natural occurrence this is not covered by a guarantee.

Assembly of Forget - Me - Not Arbour Mimosa arbour

Tools Required

- Posidrive screwdriver (electric is best)
- Drill, 6 & 3mm drill bits
- Sandpaper (to smooth any rough edges)
- Tape measure
- Step ladder
- Pencil

IMPORTANT!

PLEASE READ PRIOR TO ASSEMBLY OF THE BUILDING

EVERY PRECAUTION IS TAKEN TO ENSURE THAT YOUR BUILDING HAS NO ELEMENT INCORRECTLY PLACED OR POSSIBLY HAZARDOUS, HOWEVER PRIOR TO USE PLEASE CHECK ALL SURFACES FOR THE FOLLOWING:

- 1 RAISED GRAIN, SPLINTERS: sand down timber to smooth finish.
- 2 NAIL/SCREW/PIN HEADS PROUD: tap home to be flush with surface of timber.
- 3 DAMAGED SCREW HEADS: RESULTING IN SHARP SPLINTERS OF METAL: replace.
- 4 SHARP ENDS OF NAILS/ SCREWS/PINS PROTRUDING THROUGH THE PANEL: remove and reposition.
- 5 ENSURE ALL PARTS ARE SECURED AGAINST REASONABLE FORCE: remove and refit.
- 6 ENSURE THERE ARE NO LOOSE PARTS: remove and refit/discard.

**WE RECOMMEND THAT PROTECTIVE GLOVES
BE WORN THROUGHOUT**

Thank you and congratulations on the purchase of your Shire Garden Building. We believe that this product will give you many years of excellent service. This is a natural product manufactured to a high standard therefore if you have any queries or experience any difficulties then please contact our customer service hotline on **01945 465 295**.
Normal office hours: 8.30am to 5.00pm Monday to Friday.

Preparation of Base

We recommend that the base onto which your building will stand should be at least 75mm larger in each direction than the total floor size of the building.

Actual floor area of the building: 1250 x 665mm

Total height clearance: 2245mm

The chosen position in your garden for the siting of the building should be excavated to a depth of 75mm to allow a base of sand, on to which paving slabs can be evenly laid - **THEY MUST BE LEVEL AND FIRM.**

Batch No.4489

Treatment/Care of your Garden Building

Treat with a suitable decorative wood finish immediately. We recommend that all timber pieces be treated again prior to assembly and again within 3 months of assembly. We further recommend that all pieces are treated again at least annually or as frequently as the instructions on the product used recommends.


We would suggest that all wall panels be treated in an upside-down position to allow the finish/treatment to ingress into the tongue and groove jointing.

We would also remind you that you would rarely (if ever) be able to re-treat the underside of the floor following assembly. We strongly recommend that the underside of the floor is treated an absolute minimum of twice (not including pre-treatment).


Garden buildings are not waterproof, therefore on assembling building we recommend using a silicon based sealant between wall panels and between wall panels and floor.

Parts List


PLEASE LAY OUT PARTS AND CHECK OFF AGAINST CHECK LIST BELOW:




Back Panel **(A)**
Qty 1




Side Panel **(B)**
Qty 2




Roof Panel **(C)**
Qty 2



Seat Base **(D)**
Qty 1



Seat Back **(E)**
Qty 1



Gable Panel **(G)**
Qty 1

QTY DESCRIPTION


- | | | | | |
|---|-----------------|---|------------------|---|
| 1 Back Panel - 1418 x 1120 mm | PP120 | A 1 Roof Framework $44 \times 44 \times 722$ mm | 44R-722 | J |
| 2 Side Panels - 1418 x 538 mm | PP121 | B 2 RoofCapping $10 \times 100 \times 722$ mm | 70R-722 | K |
| 2 Roof Panels - 924 x 722 mm | RP112 | C 2 Fascia Boards | 86FC-1058 | L |
| 1 Seat Base Panel - 602 x 1120 mm | SP1 | D 1 Fascia Diamond | 95FC-1120 | M |
| 1 Seat Back Panel - 524 x 1120 mm | SP2 | E 1 Seat Fascia Board | | N |
| 4 Cornerposts-58x58 x1500 mm (Bevelled) | 58S-1500 | F 45 x 60 mm Screws | | |
| 1 Gable Panel - 581 x 1160 mm | GP104 | G 5 x 40 mm Screws | | |
| 2 Seat Supports-Sides 34x34 x 590 mm | 34R-590 | H 6 x 25 mm Screws | | |
| 1 SeatSupport-Back34x34x1052mm | 34R-1052 | I 14 x 40 mm Nails | | |

16/12/13


Assembly of Building - PLEASE READ INSTRUCTIONS PRIOR TO ASSEMBLY

A - Wall Assembly - Step One


ASSEMBLE ON LEVEL SURFACE

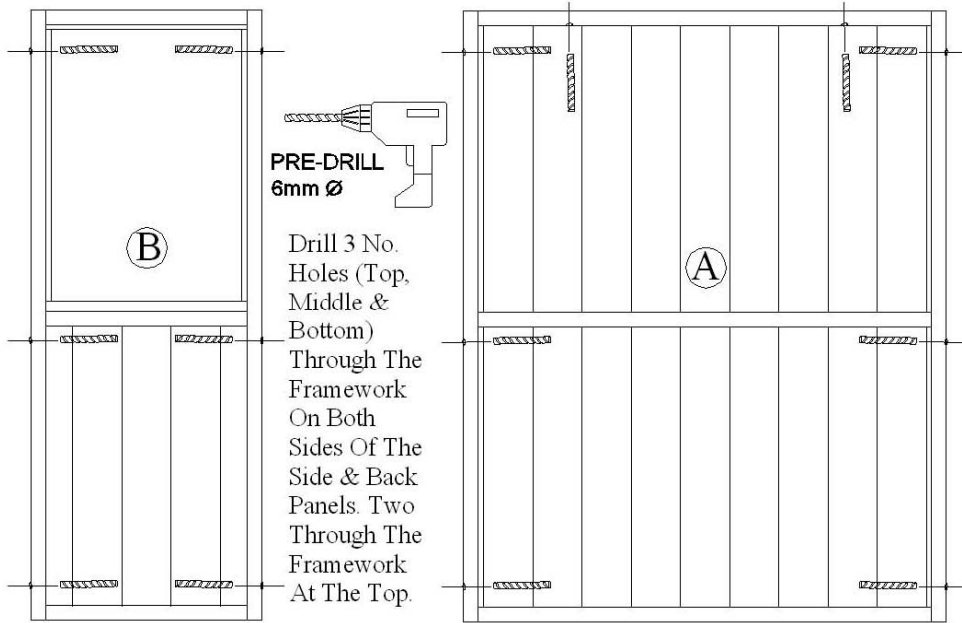


A - Wall Assembly - Step Two

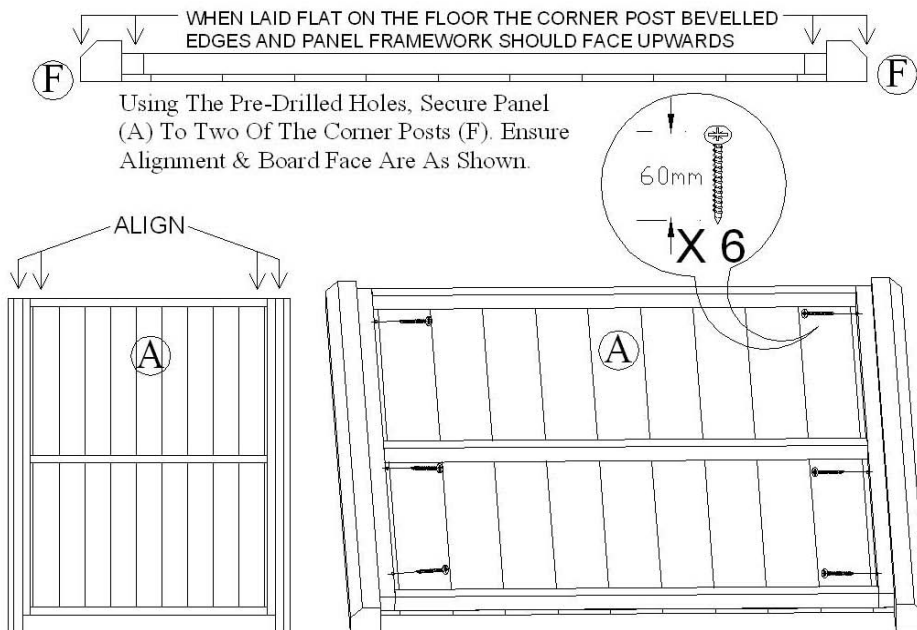


A - Wall Assembly - Step Three

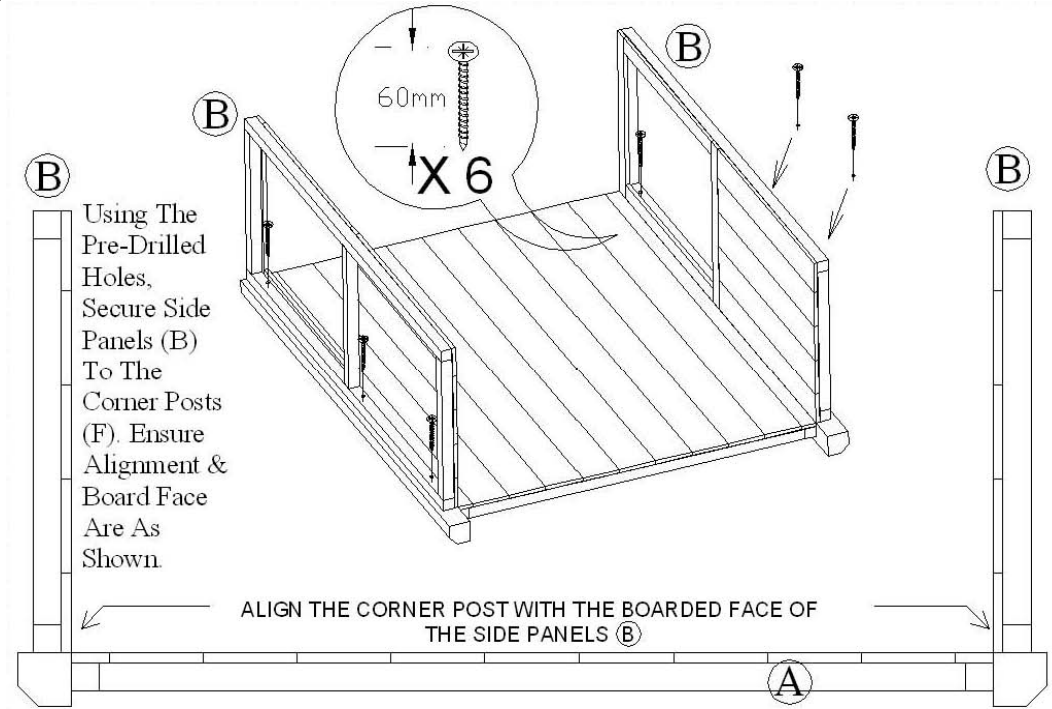


A - Wall Assembly - Step Four

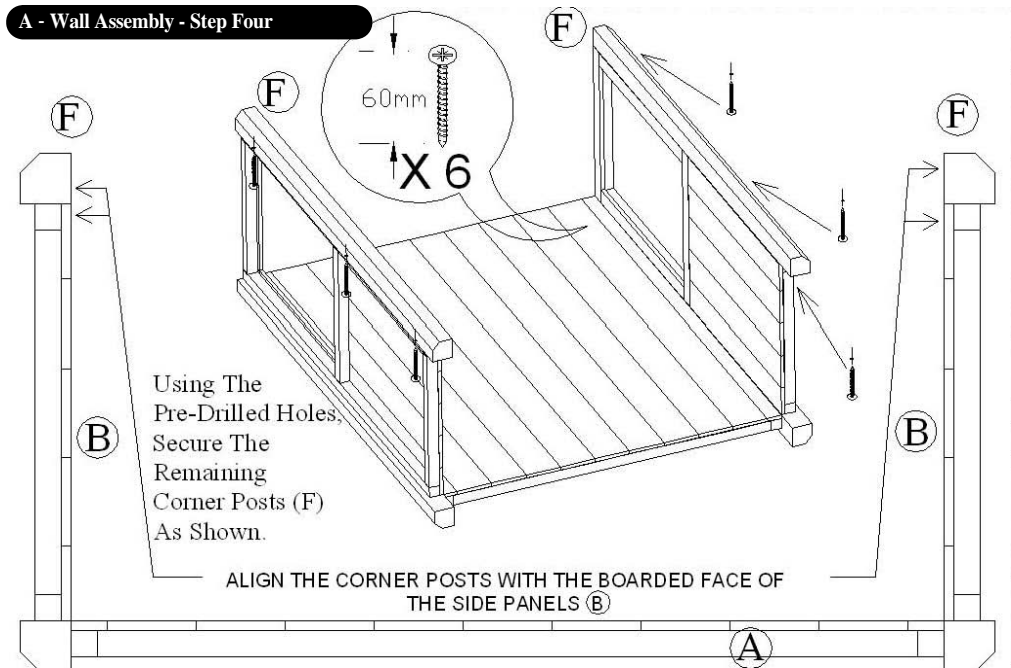

B - Gable Assembly

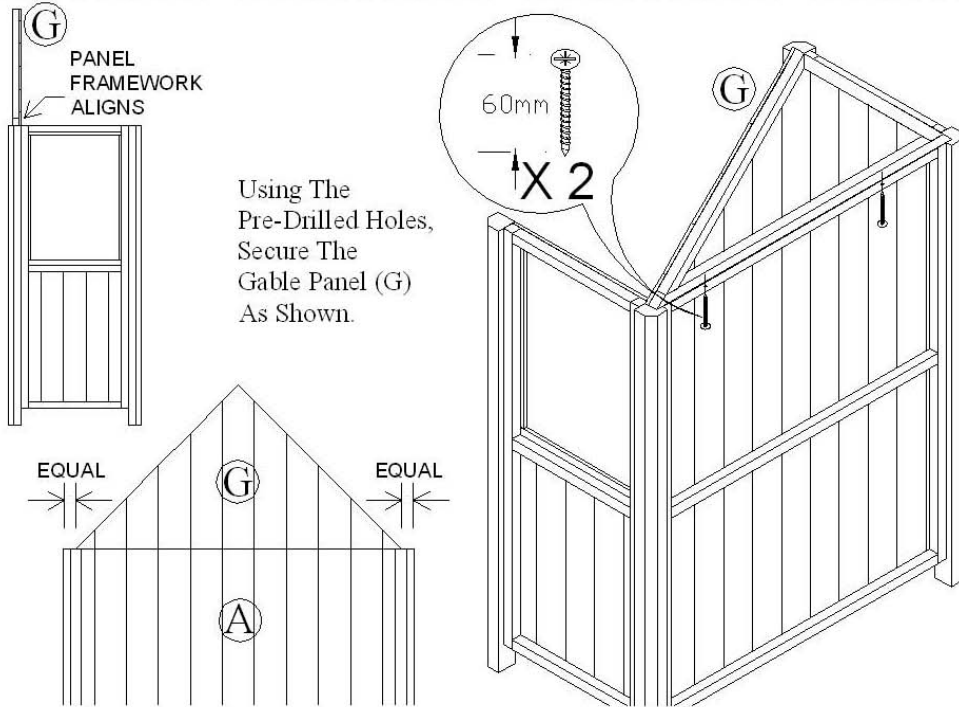


C - Seat Assembly - Step One

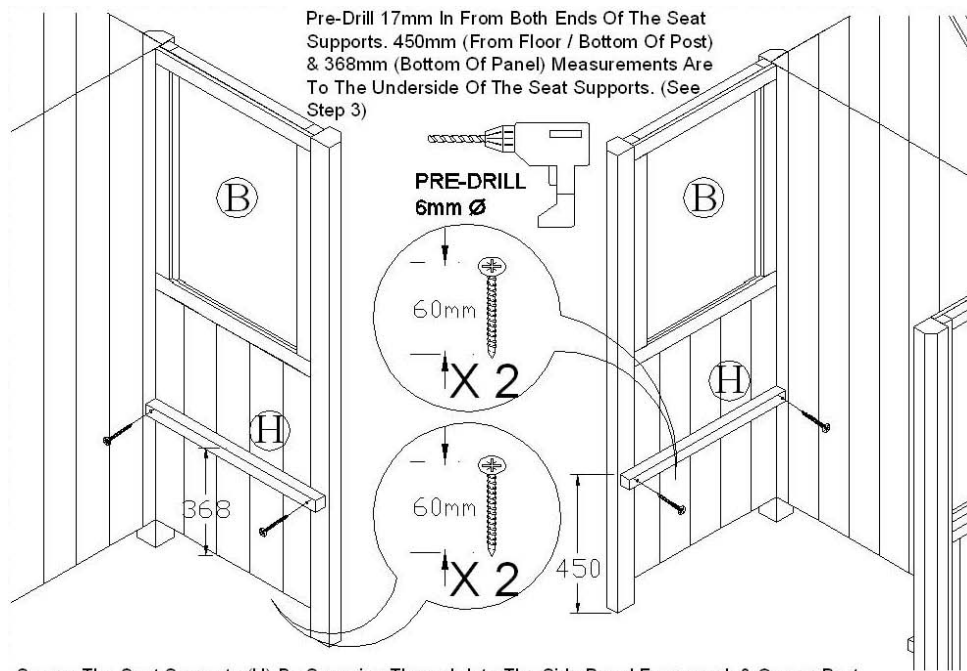


Secure The Seat Supports (H) By Screwing Through Into The Side Panel Framework & Corner Post.


C - Seat Assembly - Step Two

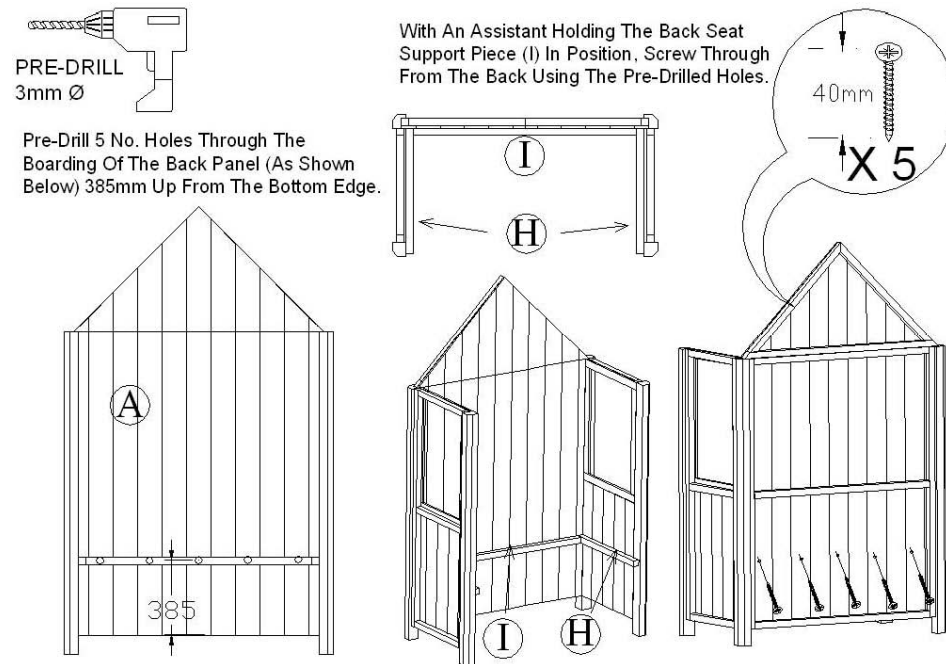


C - Seat Assembly - Step Three

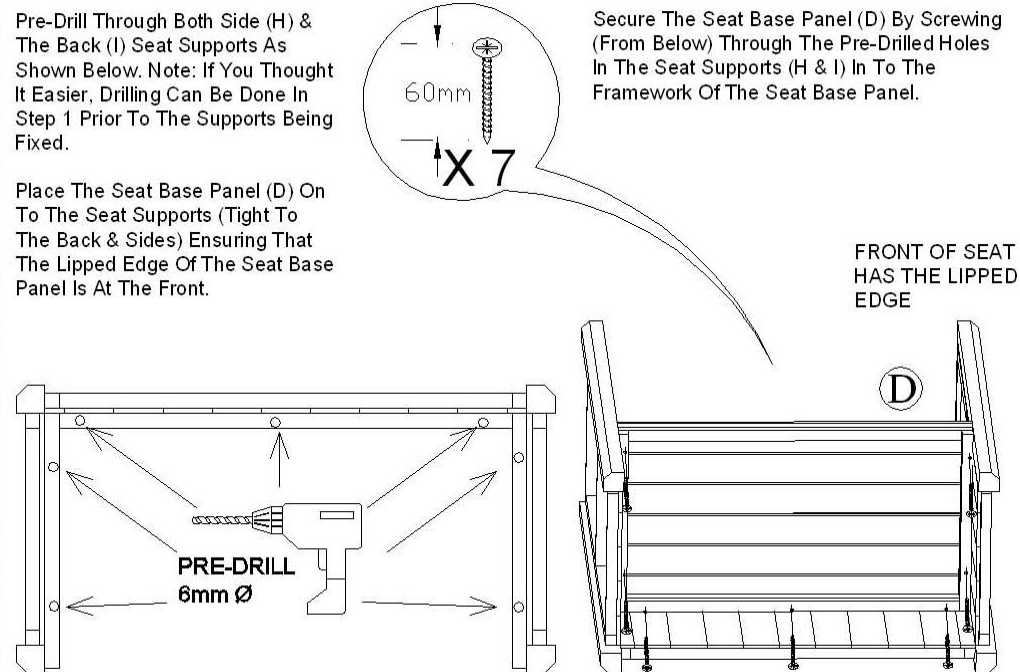


D - Roof Assembly - Step One

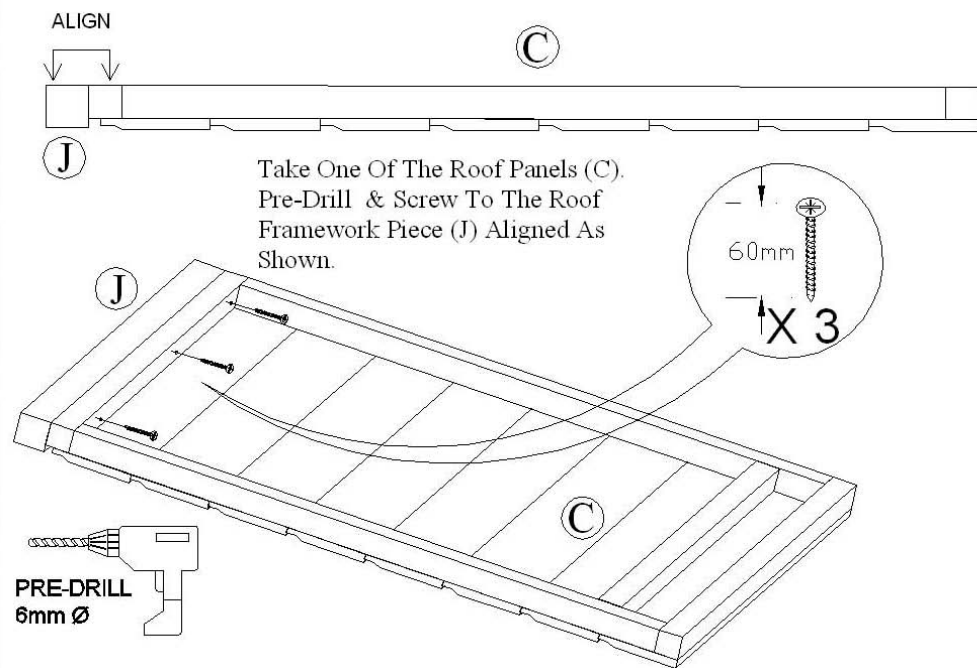


D - Roof Assembly - Step Two

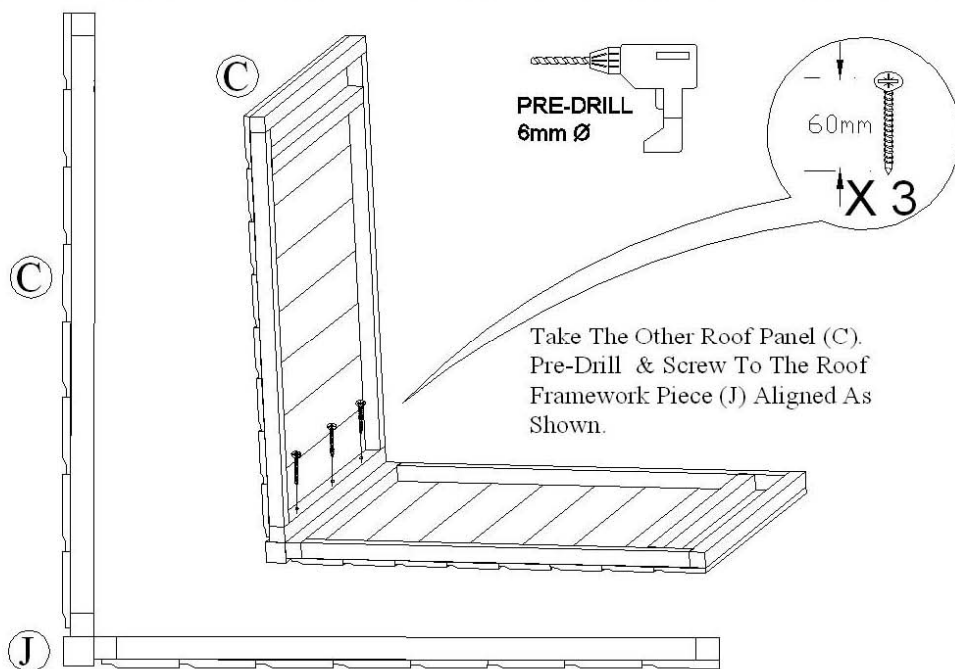


D - Roof Assembly - Step Three

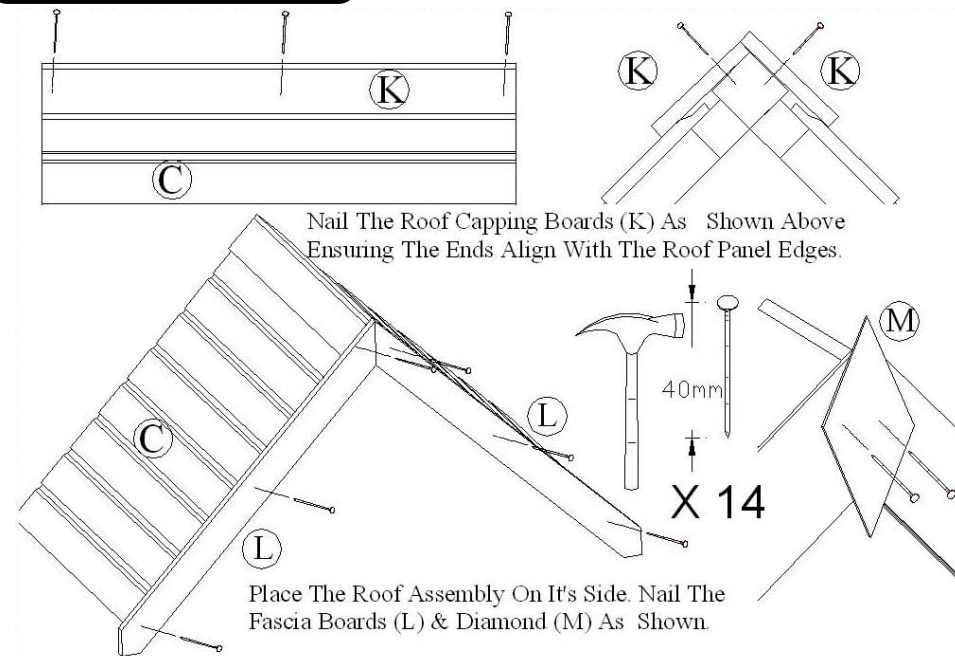

D - Roof Assembly - Step Four

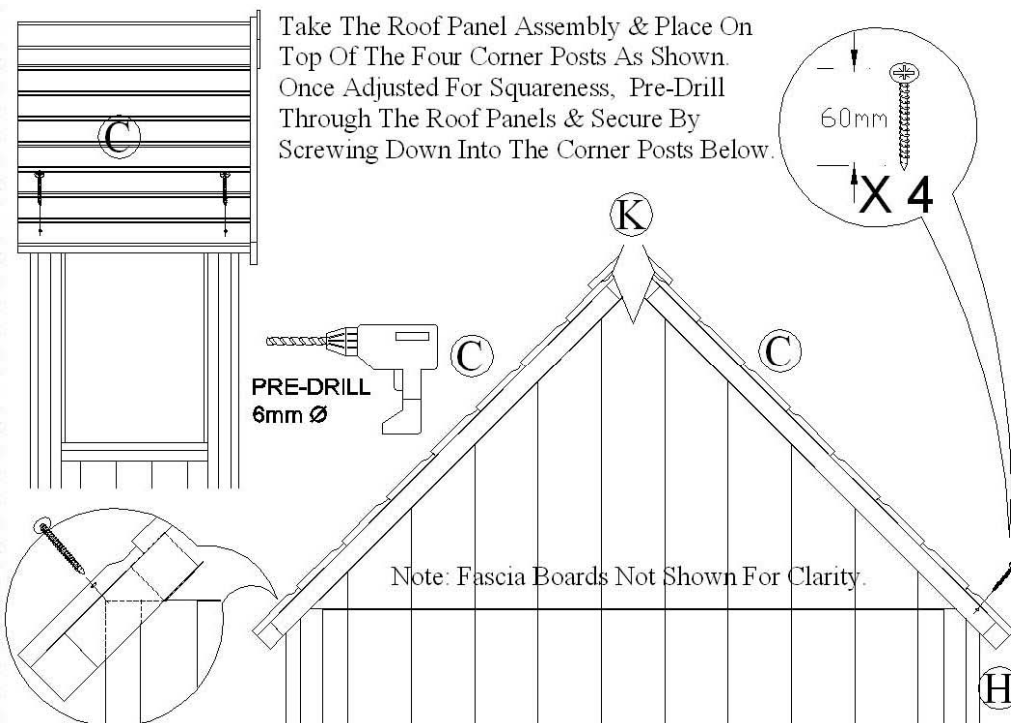


F - Seat Back Assembly - Step One

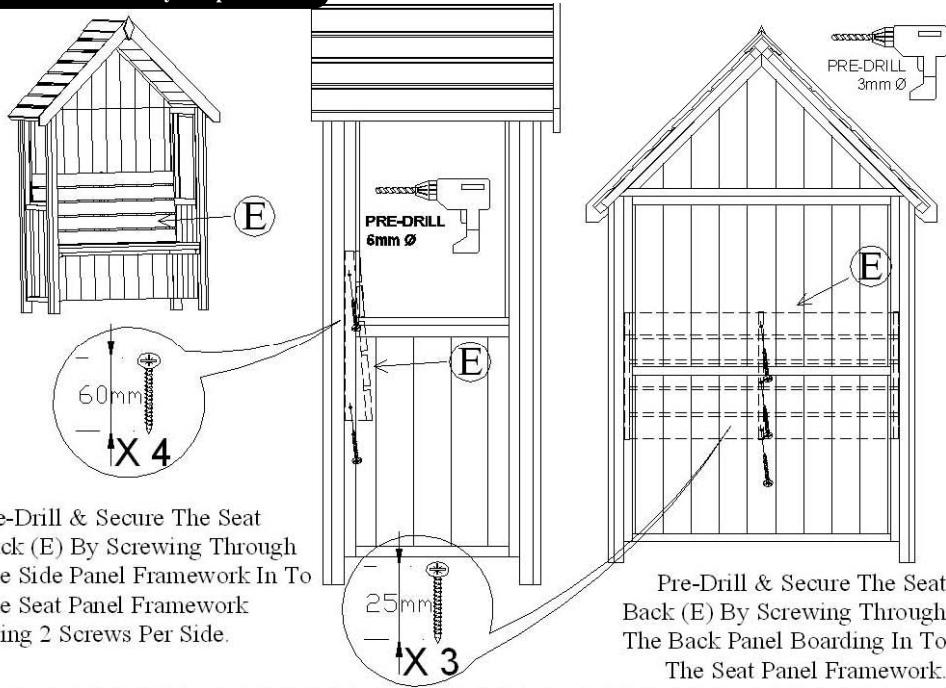

Pre-Drill & Secure The Seat Back (E) By Screwing Through The Side Panel Framework In To The Seat Panel Framework Using 2 Screws Per Side.

Pre-Drill & Secure The Seat Back (E) By Screwing Through The Back Panel Boarding In To The Seat Panel Framework.

F - Seat Back Assembly - Step Two

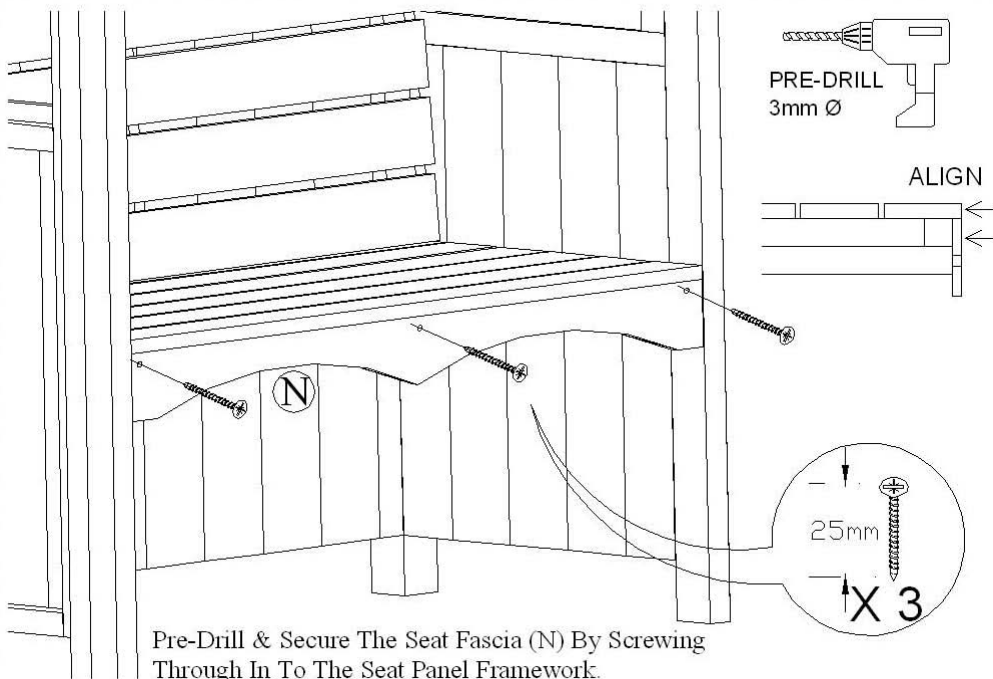

Pre-Drill & Secure The Seat Fascia (N) By Screwing Through In To The Seat Panel Framework.

COMPLETION CHECKLIST

- 1 Check and ensure that no raised grain or splinters are evident on timber components. Sand down any raised grain or splinters using fine grade sandpaper.
- 2 Check that all screw, nail and pin heads are properly tapped home and are not proud of the timber surface.
- 3 Check and ensure that no screws, nails or pins protrude through any panel.
- 4 Check and ensure that all parts are properly secured against reasonable force.

Building Photographs

It will be greatly appreciated if you could forward images of your completed building to - sales@shiregb.co.uk.