



## H4941F2RH

### Juggling Act Fountain

#### STAGE 1

Prepare a suitable location for your new fountain. The fountain should sit on a firm and level pad. Set the 4941AH juggling Act piece on your prepared setting.

#### STAGE 2

Thread the 15-45H Barbed Adapter into the coupling opening found in the back of the main bowl (see Overhead View).

#### STAGE 3

Slip the Restrictor onto the centre of the tube. Tighten the Restrictor just enough to hold it in place on the tube.

#### STAGE 4

Insert the Exhaust Fitting into the top of the pump. Place the pump into the bowl with the pump's power cord exiting out the back of the bowl, through the slot as shown.

#### STAGE 5


Push one end of the tube over the barbed adapter and the other end over the pump exhaust fitting.

#### STAGE 6

Carefully place the 4941BH on the rim of the bottom bowl. You will notice that the largest notch in the rim of the 4941BH should point toward the centre of the bottom bowl and the contours of the 4941AH will hold the small bowl secure.

#### STAGE 7

Fill the bottom bowl. Then plug the pump in to enjoy your fountain. If you desire to reduce the water flow, reach inside and tighten the Restrictor until water flow matches your preference.

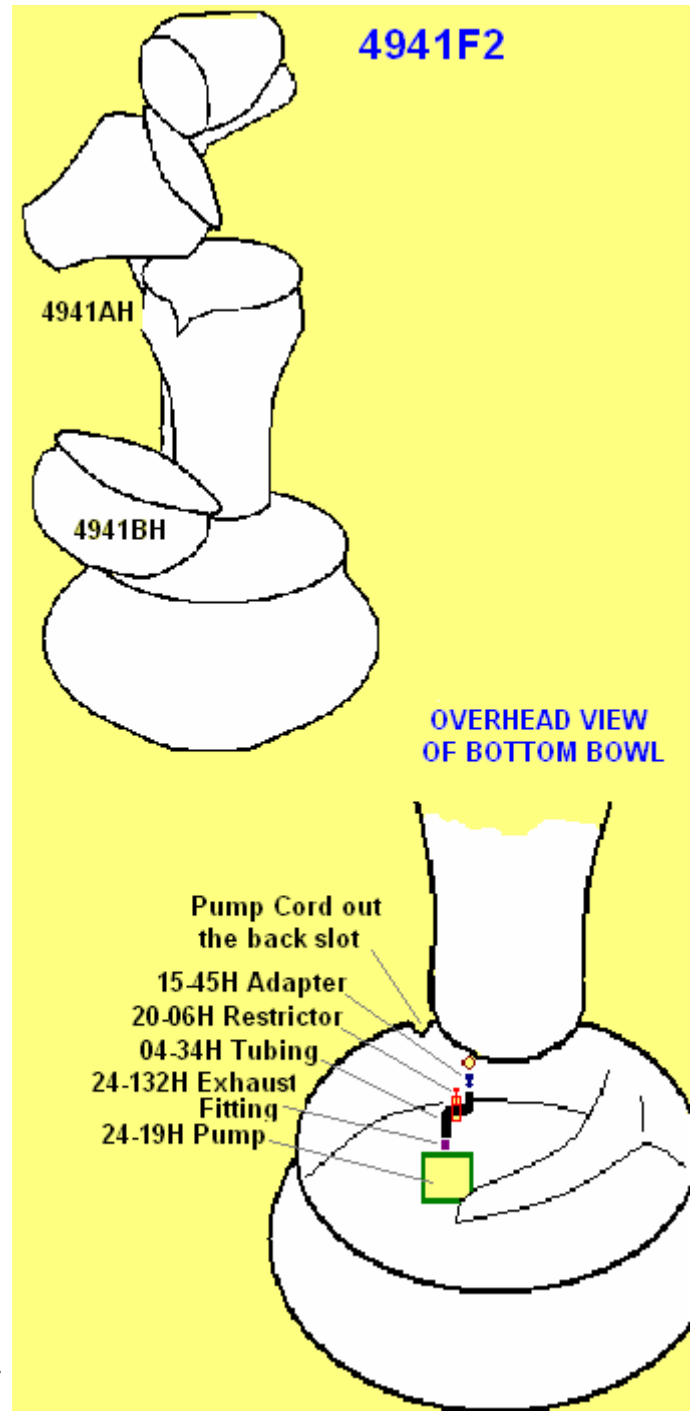

#### IMPORTANT - WINTER CARE

Winter Ice build-up can cause damage to concrete statuary. Follow these tips to reduce winter weathering to your fountain:

- Disconnect power to pumps.
- Remove adapter from bottom bowl to open drains and let all moisture out. Keep drains open throughout winter.
- Place an absorbant material like burlap, blankets etc inside vases/bowls and cover all with a fountain cover.
- Do not allow snow or ice to build up on or against the concrete. Remove snow before it turns to ice. Do not use salt or chemical ice removers as these may damage concrete.

#### ADVISORY NOTICE HEAVY ITEMS!

Please take care when handling these items