

Ready to Build - 6ft Range

Total Sheds
 28 Charles Street,
 Willenhall, WV13 1HG
 Tel: 01902 636 529
 Email: info@totalsheds.co.uk

Thank you for purchasing your Total Shed.

All of our sheds are made from only the finest selected timber which are (Tanalised), specially pressure treated for a longer and lasting durable life span to the elements.

Each shed is carefully packed and delivered on a pallet ready to be assembled.

FEATURES NEW FLEXIBLE, INTER-CHANGEABLE DESIGN FOR YOUR INDIVIDUAL STYLE.

2 Persons Recommended for Assembling Shed


Tools Required to Build:



PLEASE NOTE: Use extreme caution when using any tools. Always wear safety gear where necessary. It is advisable that at least 2 or more persons assemble the shed for health and safety purposes. We are not responsible for any injuries caused whilst assembling this shed.

Ready to Build Shed

DELIVERED FLAT PACKED IN EASY TO INSTALL SECTIONS...

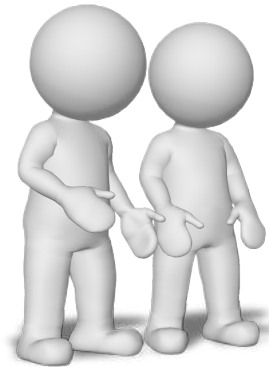

Includes 4x6ft to 20x6ft Instructions

Featured Build of the Pent 10x6ft Shed

Check List: See your shed size for details.
Your delivery should contain the following:

FLEXIBLE, INTER-CHANGEABLE PANELS FOR YOUR INDIVIDUAL STYLE & PREFERENCE...

If your thinking of mixing it up then just a few key points to bare in mind.

All 4ft panels can be fitted in any order but 2ft panels must always be fitted on far left of shed build.

Take a few moments to study the manual and get an idea of how your shed should look after each step.

20x6ft Pent Range

© Sheds (Midlands) Limited 2021

4x6ft PENT SHED



4x6ft Pack

- x1 Floor (4x6ft)
- x1 Pent Roof Section (4x6ft)
- x2 Pent Angle Tops (6ft)
- x1 Pent Roof Top (4ft)
- x2 Blank Panels (4ft Wide)
- x2 Blank Panels (2ft Wide)
- x1 Door Panel Single Double
- x1 Window Panel
- x2 Heavy Duty Posts (6ft)
- x4 Felt Strips (4ft x2) (6ft x2)
- x6 Corner Strips
- x2 Diamond Caps
- x1 Fixing Kit
(found in the polytube pack)
- Instruction Manual

Checked & Signed by:



6x6ft PENT SHED



6x6ft Pack

- Floors 1x (4x6ft) 1x (2x6ft)
- Pent Roof Sections 1x (4x6ft) 1x (2x6ft)
- Pent Roof Tops 1x (4ft) 1x (2ft)
- x2 Blank Panels (4ft Wide) x4 Panels (2ft Wide)
- x2 Pent Angle Tops (6ft)
- x1 Door Panel Single Double
- x6 Felt Strips (2x 6ft) (2x 4ft) (2x 2ft)
- x1 Window Panel
- x2 Heavy Duty Posts (6ft)
- x8 Corner Strips
- x2 Diamond Caps
- x3 Roof Felt (7ft Lengths)
- x1 Fixing Kit
(found in the polytube pack)
- Instruction Manual

Checked & Signed by:



8x6ft PENT SHED



8x6ft Pack

- x2 Floors (4x6ft)
- x2 Pent Roof Section (4x6ft)
- x2 Pent Angle Tops (6ft)
- x2 Pent Roof Tops (4ft)
- x8 Felt Strips (4ft x6) (6ft x2)
- x1 Door Panel Single Double
- x4 Blank Panels (4ft Wide)
- x2 Blank Panels (2ft Wide)
- x2 Heavy Duty Posts (6ft)
- x1 Window Panel
- x8 Corner Strips
- x2 Diamond Caps
- x3 Roof Felt (9ft Lengths)
- x1 Fixing Kit
(found in the polytube pack)
- Instruction Manual

Checked & Signed by:



10x6ft PENT SHED



10x6ft Pack

- Floors 2x (4x6ft) 1x (2x6ft)
- Pent Roof Sections 2x (4x6ft) 1x (2x6ft)
- Pent Roof Tops 2x (4ft) 1x (2ft)
- x4 Blank Panels (4ft Wide) x4 Panels (2ft Wide)
- x2 Pent Angle Tops (6ft)
- x1 Door Panel Single Double
- x8 Felt Strips (4ft x4) (6ft x2) (2ft x2)
- x2 Heavy Duty Posts (6ft)
- x1 Window Panel
- x10 Corner Strips
- x4 Diamond Caps
- x3 Roof Felt (11ft)
- x1 Fixing Kit
(found in the polytube pack)
- Instruction Manual

(found in the polytube pack)

Instruction Manual

Checked & Signed by:



12x6ft PENT SHED



12x6ft Pack

- x3 Floors (4x6ft)
- x2 Heavy Duty Posts (6ft)
- x3 Pent Roof Section (4x6ft)
- x2 Pent Angle Tops (6ft)
- x3 Pent Roof Tops (4ft)
- x5 Blank Panels (4ft Wide)
- x2 Blank Panels (2ft Wide)
- x2 Window Panels
- x1 Door Panel
 Single
 Double
- x8 Felt Strips (4ft x6) (6ft x2)
- x10 Corner Strips
- x4 Diamond Caps
- x3 Felt (13ft Length)
- x1 Fixing Kit
(found in the polytube pack)
- Instruction Manual

Checked & Signed by:



14x6ft PENT SHED



14x6ft Pack

- Floors 3x (4x6ft) 1x (2x6ft)
- Pent Roof Sections 3x (4x6ft) 1x (2x6ft)
- Pent Roof Tops 3x (4ft) 1x (2ft)
- x5 Blank Panels (4ft Wide) x4 Panels (2ft Wide)
- x2 Pent Angle Tops (6ft)
- x10 Felt Strips (6x 4ft) (2x 6ft) (2x 2ft)
- x1 Door Panel Single Double
- x2 Heavy Duty Posts (6ft)
- x2 Window Panels
- x12 Corner Strips
- x6 Diamond Caps
- x3 Roof Felt (15ft Lengths)
- x1 Fixing Kit
(found in the polytube pack)
- Instruction Manual

Checked & Signed by:



16x6ft PENT SHED



16x6ft Pack

- x4 Floors (4x6ft)
- x4 Pent Roof Section (4x6ft)
- x2 Pent Angle Tops (6ft)
- x4 Pent Roof Tops (4ft)
- x1 Door Panel Single Double
- x6 Blank Panels (4ft Wide)
- x2 Blank Panels (2ft Wide)
- x2 Heavy Duty Posts (6ft)
- x3 Window Panels
- x10 Felt Strips (8x4ft) 2x 6ft)
- x12 Corner Strips
- x6 Diamond Caps
- x3 Roof Felt (17ft Lengths)
- x1 Fixing Kit
(found in the polytube pack)
- Instruction Manual

Checked & Signed by:



18x6ft PENT SHED



18x6ft Pack

- Floors 4x (4x6ft) 1x (2x6ft)
- Pent Roof Sections 4x (4x6ft) 1x (2x6ft)
- Pent Roof Tops 4x (4ft) 1x (2ft)
- x6 Blank Panels (4ft Wide) x4 Panels (2ft Wide)
- x2 Pent Angle Tops (6ft)
- x1 Door Panel Single Double
- x2 Heavy Duty Posts (6ft)
- x3 Window Panels
- x10 Felt Strips (4ft x8) (6ft x2) (2ft x2)
- x12 Corner Strips
- x8 Diamond Caps
- x3 Roof Felt (19ft Lengths)
- x1 Fixing Kit
(found in the polytube pack)
- Instruction Manual

Checked & Signed by:



20x6ft PENT SHED



20x6ft Pack

- x5 Floors (4x6ft)
- x5 Pent Roof Section (4x6ft)
- x2 Pent Angle Tops (6ft)
- x5 Pent Roof Tops (4ft)
- x1 Door Panel Single Double
- x7 Blank Panels (4ft Wide)
- x2 Blank Panels (2ft Wide)
- x4 Window Panels
- x12 Felt Strips (4ft x10) (6ft x2)
- x14 Corner Strips
- x8 Diamond Caps
- x3 Roof Felt (21ft)
- x2 Heavy Duty Posts (6ft)
- x1 Fixing Kit
(found in the polytube pack)
- Instruction Manual

Checked & Signed by:



Unpacking your parts:


Unpack all of the components and check that you have all the parts required. Please use the checklist on previous page.

Carefully dispose of the delivery pallet and any excess timber.

Advisable: The underside of the floor must be treated with a quality wood preserver.



SET THE SHED FOUNDATION

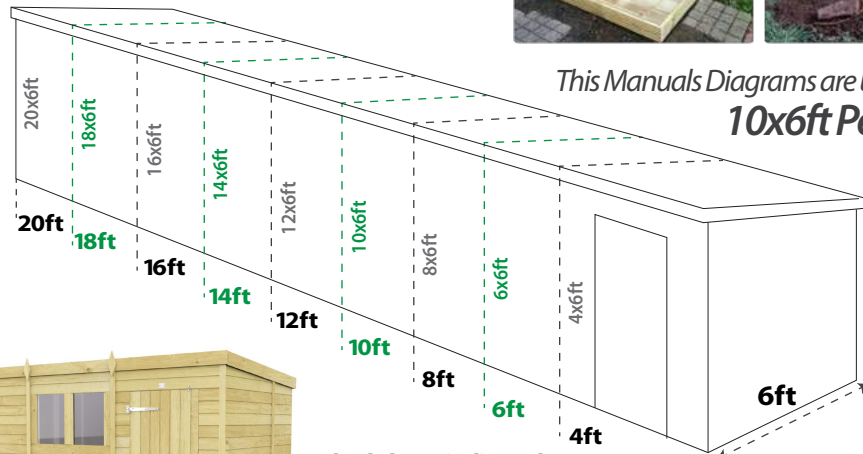


This Manuals Diagrams are based on the 10x6ft Pent Shed



Shed Floors indicated in Green will have 2ft Floor Section included.

Shed Floor Build Guide

Follow the above layout according to your shed size.

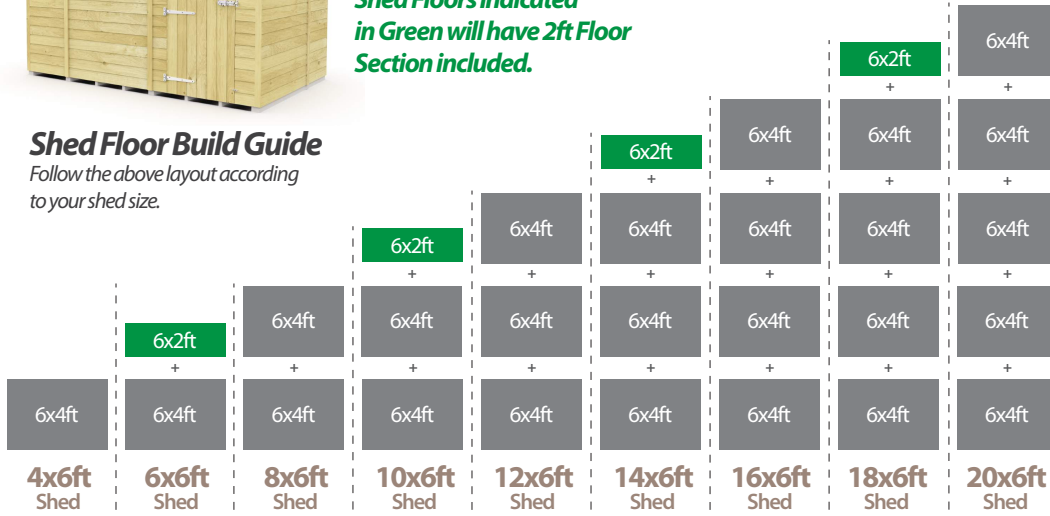

Recommended: Paint shed in an oil based treatment to prevent water ingress into the timber. Also silicon your windows (*Must silicon inside & outside*) to prevent rain water seeping through the gaps between glass and the timber.

SHED FLOOR: Set your shed base.

NOTE: 4x6ft Sheds Please Skip to STEP 2

PLEASE NOTE: 6ft • 10ft • 14ft & 18ft Sheds always start with laying 2x6ft Floor First! then...

Repeat Steps with 4x6ft Floors as shown below:

8x6ft Repeat x1

10x6ft Repeat x1


12x6ft Repeat x2

14x6ft Repeat x3

16x6ft Repeat x3

18x6ft Repeat x3

20x6ft Repeat x4

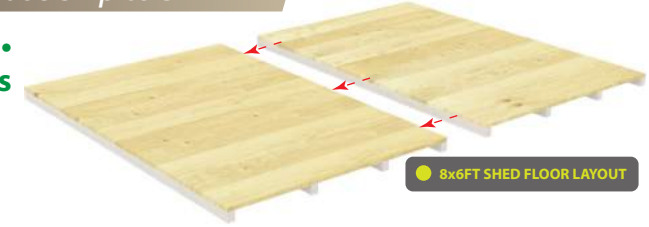

1a. Place the 6ft side ends of the floors to match as below, then screw together using screws provided at the end of the bearer points. Use RED areas as joining points.


1b. Repeat this process for larger sheds in similar fashion.

1c. Check that all floor sections are securely attached and in a straight line to avoid any problems later on the build stage. Use a Spirit Level if need be to get accurate results.

1d. Secure the floor sections together by screwing the floor bearers at each end where they meet as shown in diagram 1d.



6x6ft Sheds: Add 2ft floor

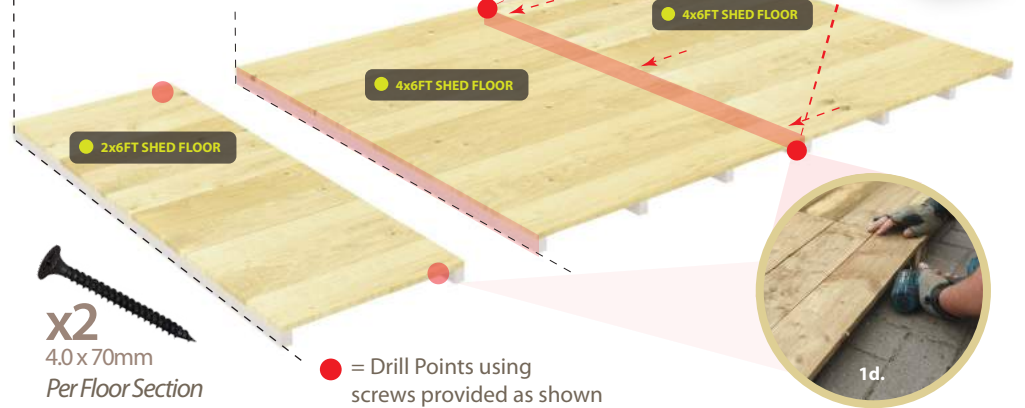

1d.

FLOOR & BLOCK ENDS


Add the Floor Block Ends.
(Heavy Duty Posts 6ft)



IMPORTANT

6ft, 10ft, 14ft & 18ft
Sheds must add
2ft floor on left end.

As shown on this diagram.

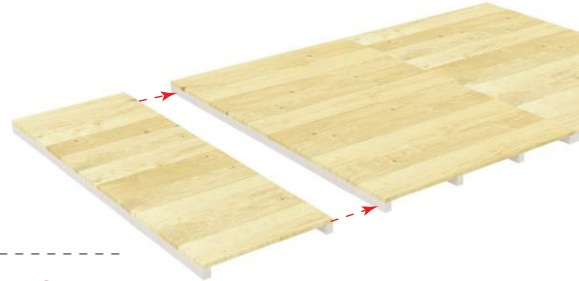

PLEASE NOTE: Larger sheds will have extra floor sections so please ensure all sections are connected correctly then the Floor Blocks are added only after the floor is complete.

● = Drill Points using screws provided as shown




2a. Place the 6ft long Floor Block Ends provided on both ends of the floor alongside existing floor bearers as shown below.

2b. Fix together by screwing the Floor Blocks at each end as shown. Use the screws provided and make sure the ends are fixed securely. 3 screws on each end will suffice.



DRILL DRIVER

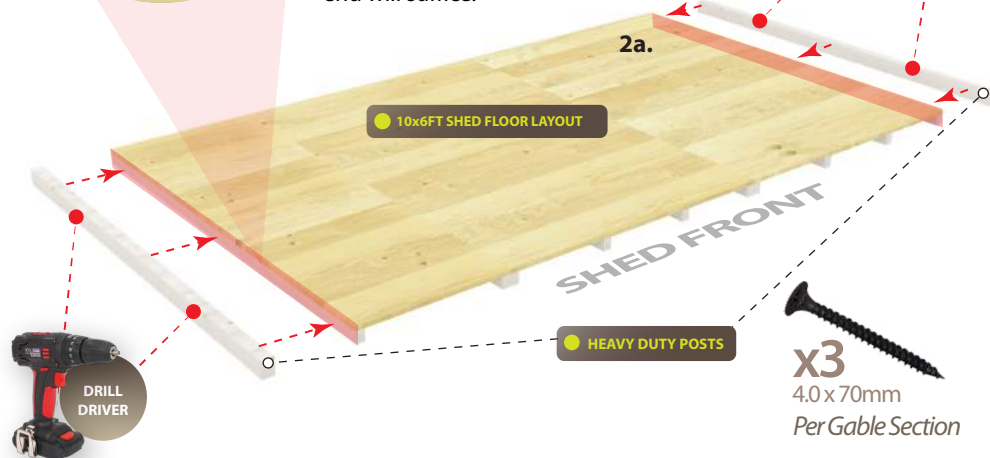

2ft RIGHT SIDE PANEL

Attach 2ft Wide Section
Side Wall 2ft Blank Section



Begin with right side of shed floor with a blank 2ft panel.

3a. Place the 2ft panel side against the far right side of shed floor shown making sure the panel is sitting firmly on 6ft Heavy Duty Bearer (Floor Block).


3b. Now prepare a 4ft blank panel to make an 'L' shape with the 2 frames (2ft & 4ft Blank Panels)

See Step 4

3c. DO NOT fix the panels at this stage to the floor to leave room for adjustments in the final stages.

Next Step will create a corner frame balance with 4ft panel.

● = Drill Points using screws provided as shown

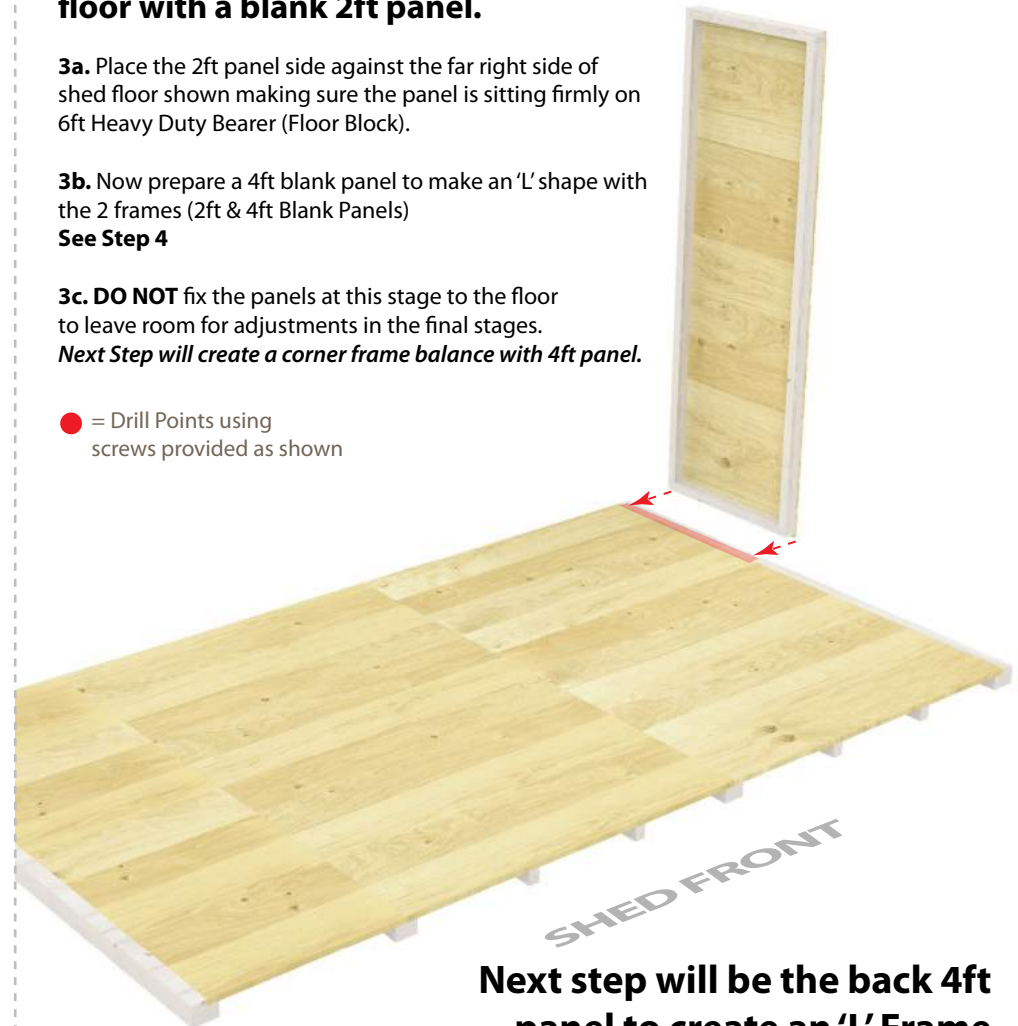

Next step will be the back 4ft panel to create an 'L' Frame

SIDE & REAR PANELS

Fix 4ft Wide Blank Sections

Create Corner for Balance.



Repeat Steps with 4ft Blank Panels as shown below:

8x6ft Repeat x1

10x6ft Repeat x1

12x6ft Repeat x2

14x6ft Repeat x3

16x6ft Repeat x3

18x6ft Repeat x3

20x6ft Repeat x4

● = Drill Points using screws provided as shown




x3
4.0 x 70mm
Per Panel Edge

4a. Now place a blank 4ft panel side as shown. Create an 'L' Shape. Repeat this step for all larger sheds. Please use reference on left for additional sections required according to your shed size.

4b. Screw the panels at the framework as shown in Diagram 5b.

4c. DO NOT fix the panels at this stage to the floor to leave room for adjustments in the final stages.

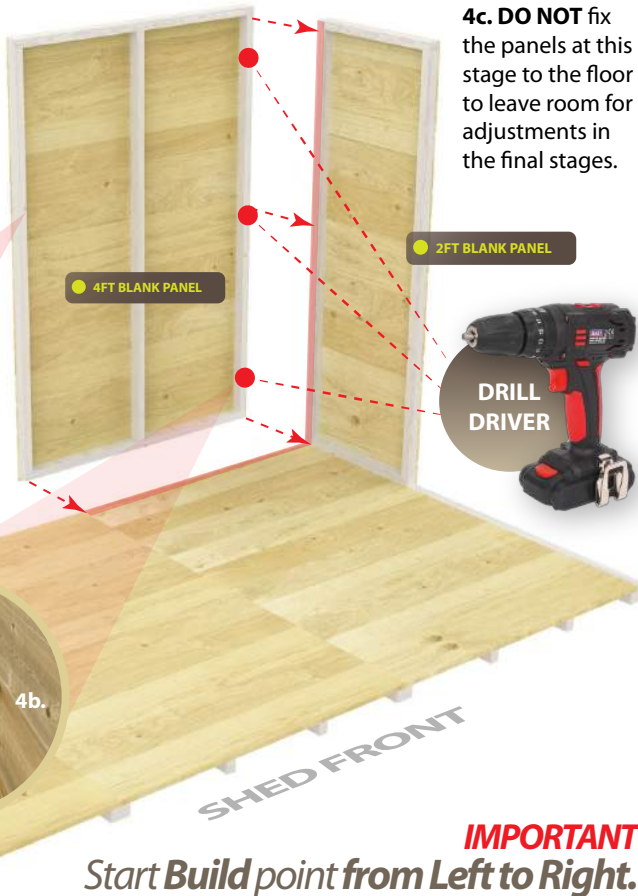

IMPORTANT
Start **Build point from Left to Right.**
As shown on the diagram.

4ft RIGHT SIDE PANEL

Place blank 4ft panel against right of shed floor as shown. (4ft wide blank panel)



5a. Place the 4ft blank panel as shown along the right end of the shed aligning with the edge of the 2ft panel and Floor Block. See Diagram 5a.


Use RED highlighted area as guide.

5b. It is advisable to have a second person holding the panel in place while the next section is attached. You may notice that the panels will have nothing to balance on or against at this stage. It is advisable to use supports if required at this stage till the corner frames are attached for balance.

5c. Screw the panels together as shown on diagram 5c.

NOTE: Place panel to sit firmly on the side Floor Block.

x3
4.0 x 70mm
Per Panel Edge

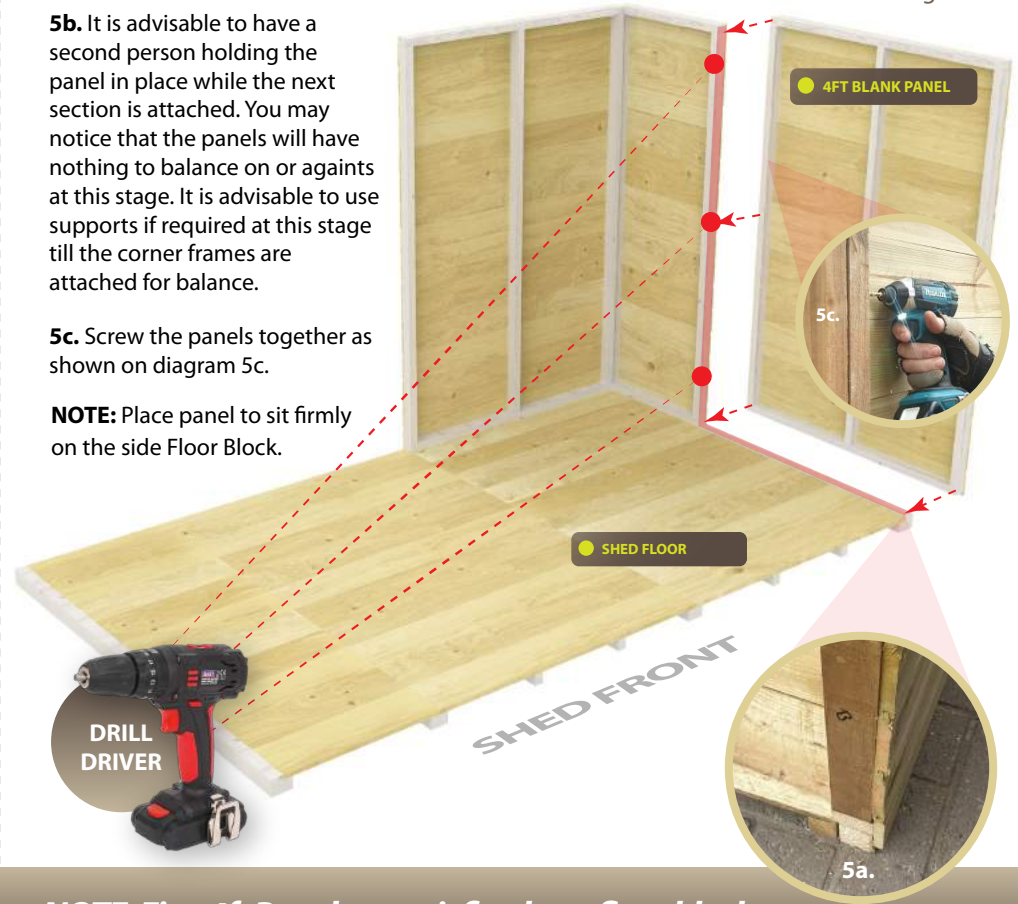

NOTE: First 4ft Panel must sit firmly on floor block

2ft REAR PANELS Fix 2ft Wide Blank Section Last Back Panel 2ft Section



NOTICE:

8x6ft SKIP Step

12x6ft SKIP Step

16x6ft SKIP Step

20x6ft SKIP Step


Jump to Step 7

6a. Place the 2ft panel side against the remaining 4ft back panels as shown making sure the panel is sitting firmly on the shed floor and the side meeting the framework of the back 4ft blank panel.

6b. Fix the panels together with screws as shown in diagram. You may require some supports to keep frames upright whilst building longer sheds.

Use RED Area as placement guide.

● = Drill Points using screws provided as shown

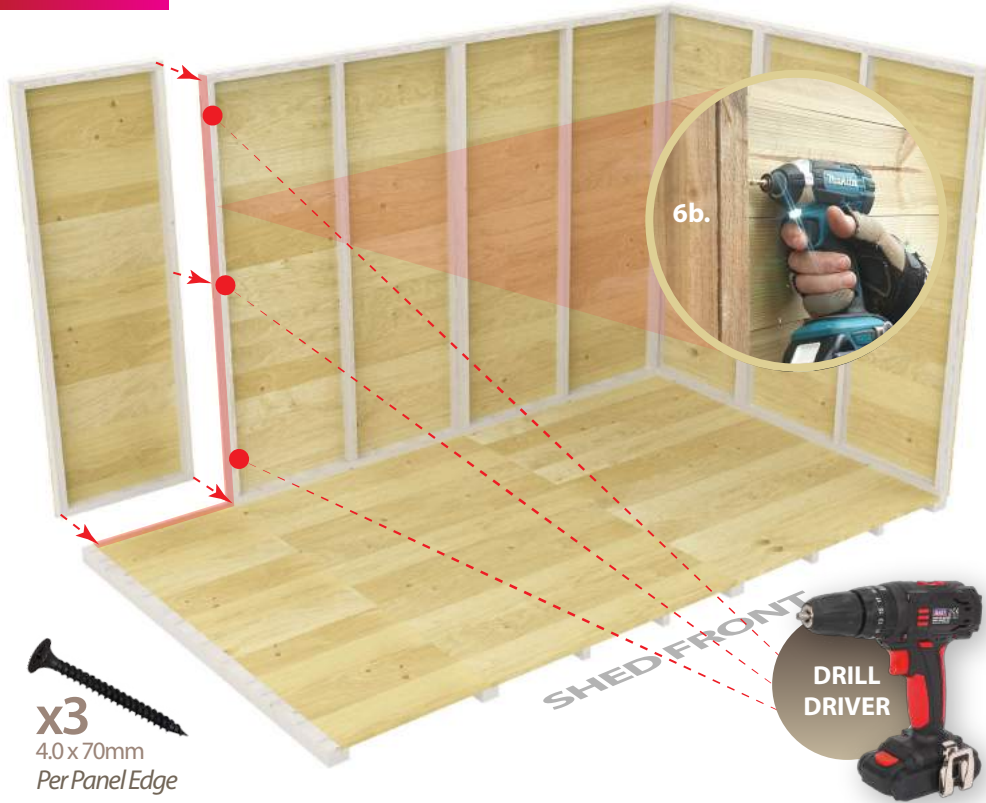

2ft LEFT SIDE PANEL Attach Left 2ft Section Side Wall 2ft Blank Section




7a. Place the 2ft panel side against the corner of the back 2ft floor as shown making sure the panel is sitting firmly on the shed floor and the side meeting the framework of the back 2ft blank panel.

7b. Fix the panels together with screws as shown in diagram. You may require some supports to keep the frame upright whilst building longer sheds.

Use RED Area as placement guide.

● = Drill Points using screws provided as shown

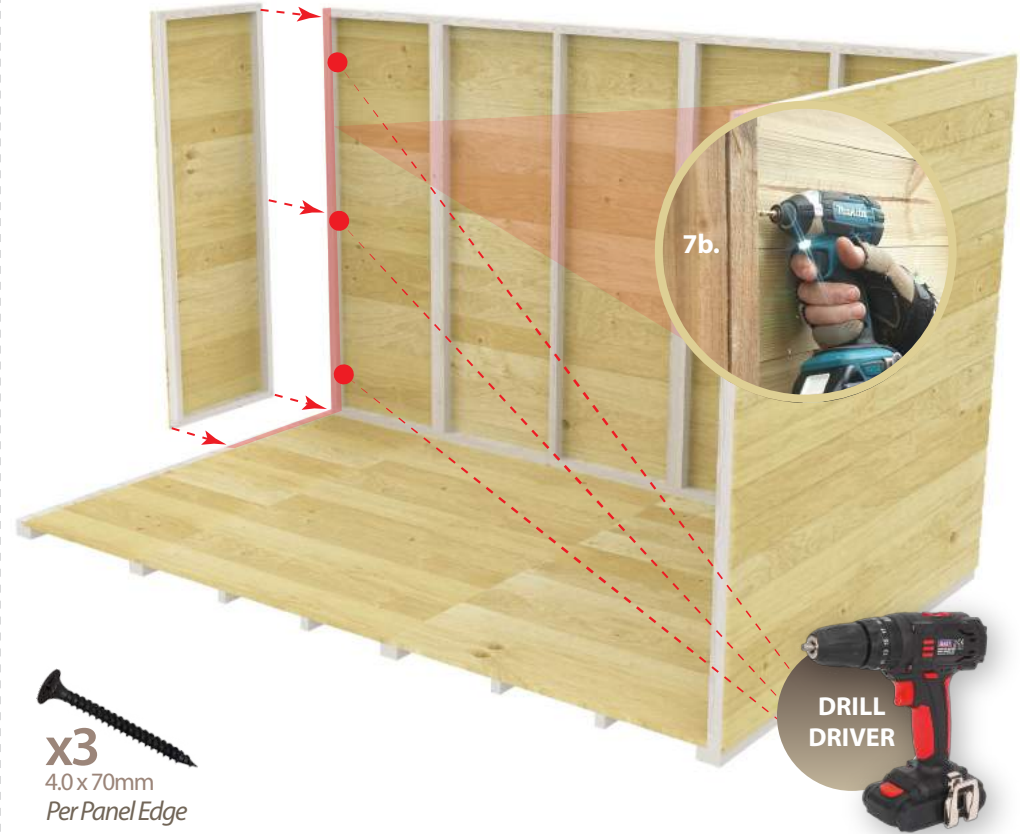

LEFT SIDE PANEL Now attach Left Side Panel (4ft wide left blank section)

8a. Place the 4ft left side panel as shown below. Screw sections together as shown in diagram 8a.

8b. Check that all the frames are correctly fixed and screwed together from the sides. Use more screws to strengthen if necessary.

● = Drill Points using screws provided as shown



Use Red Area as placement guide.



DRILL DRIVER

DO NOT screw the standing panels down to the floor just yet.
Leave room for adjustments when the final frame is fitted.

FRONT DOOR PANEL Attach final Front Panel (4ft Panel: Single or Double Door)

9a. Now start back from the Right side placing the 4ft Door Panel as shown. Fix together with screws to the right side panel framework as shown in diagram 9a.


DID YOU KNOW?
Door panels can be placed anywhere a 4ft panel is, this counts for window panels too.

● = Drill Points using screws provided as shown

Use Red Area as placement guide.



DRILL DRIVER

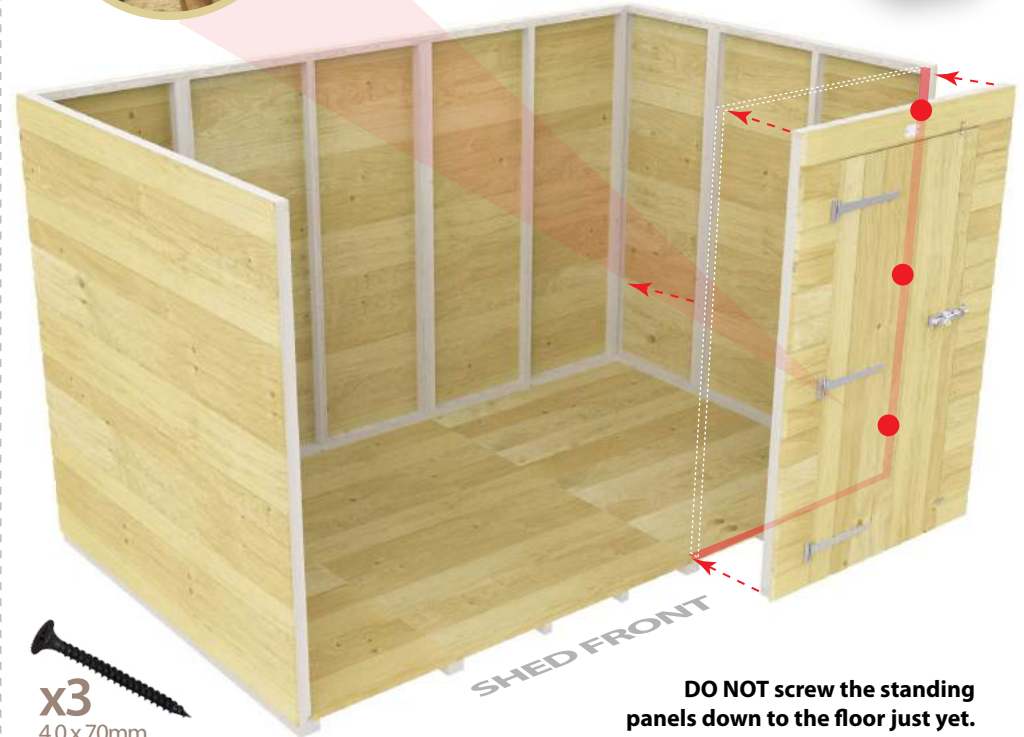

x3
4.0 x 70mm
Per Panel Edge

DO NOT screw the standing panels down to the floor just yet.
Leave room for adjustments when the final frame is fitted.

WINDOW PANELS Attach Window Panels (4ft Window Panels)

Repeat Steps with 4ft Window Panels as below:

12x6ft Repeat x1

14x6ft Repeat x1

16x6ft Repeat x2

18x6ft Repeat x2

20x6ft Repeat x3

10a. Place 4ft front window panel as shown and fix in place at the meeting points with screws. Fix the panel sides with 3 screws.

10b. Repeat this step for larger models as shown on the diagram to the left.

DID YOU KNOW?


Window panels can be placed anywhere a 4ft panel is, this counts for door panel too.

Use the RED Area as placement guide.



DRILL DRIVER

● = Drill Points using screws provided as shown

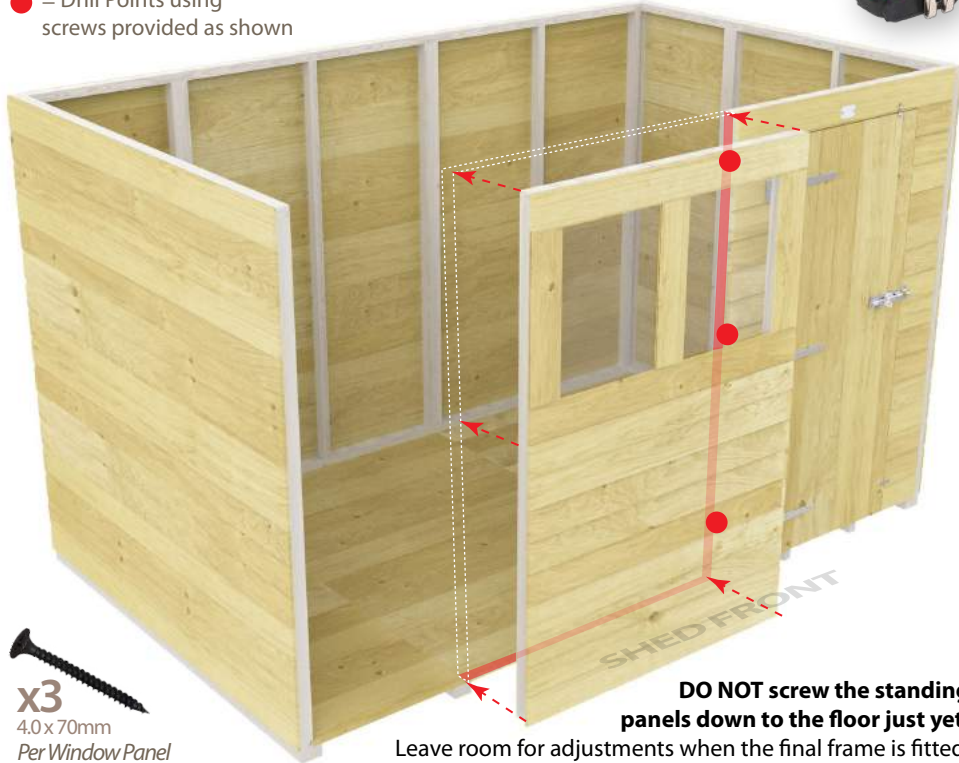

2ft FRONT PANEL Place the Final 2ft Panel For 6ft, 10ft, 14ft & 18ft Sheds

11a. Place the final front panel as shown below to complete the outer framework. Then adjust and screw down the panels to the shed floor to make the build secure.

NOTICE:

8x6ft SKIP Step

12x6ft SKIP Step

16x6ft SKIP Step

20x6ft SKIP Step

Jump to Step 12

11b. Use the RED areas below as reference to the joining points of the final panel. Note the 2ft section should fit perfectly to complete the front section.

11c. Make sure all panels are straight and screwed down firmly to each other to strengthen the outer framework before continuing.

● = Drill Points using screws provided as shown



DRILL DRIVER


SIDE PENT ANGLE TOPS

Now attach all the Side Tops of Pent Shed End Panels.



- 12a.** Place the right and left Pent Angle Tops as shown below. Make sure the higher ends are at the front of the shed as shown in the diagram below.
- 12b.** Adjust the panels so that the tongue & groove are fixed together in place correctly. Use a hammer to lightly tap in to the grooves to create a perfect fit.
- 12c.** Attach the sections down by screwing through the inner frameworks of both panels.

● = Drill Points using screws provided as shown

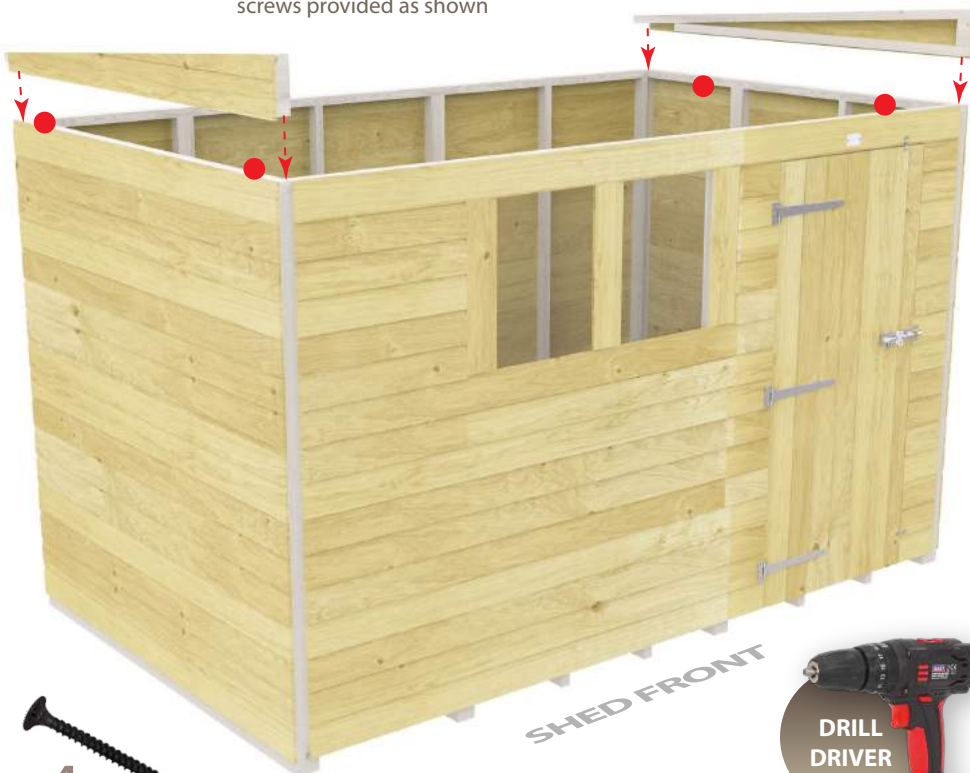

x4
4.0 x 70mm



DRILL DRIVER

PENT FRONT TOPS

Place the front tops of shed.


Use 2ft Section for below models.

6x6ft • 6x10ft • 6x14ft • 6x18ft



- 13a.** Place the 4ft Pent Front Top sections in place. Use any 2ft sections if your shed size is one of the above. Make sure the 2ft section is placed on top of the 2ft front panel only as shown in the diagram.
- 13b.** Adjust the panels so that the tongue & groove are fixed together in place correctly. Use a hammer to lightly tap in to the grooves to create a perfect fit.
- 13c.** Attach the sections down by screwing through the inner frameworks of both panels.

● = Drill Points using screws provided as shown

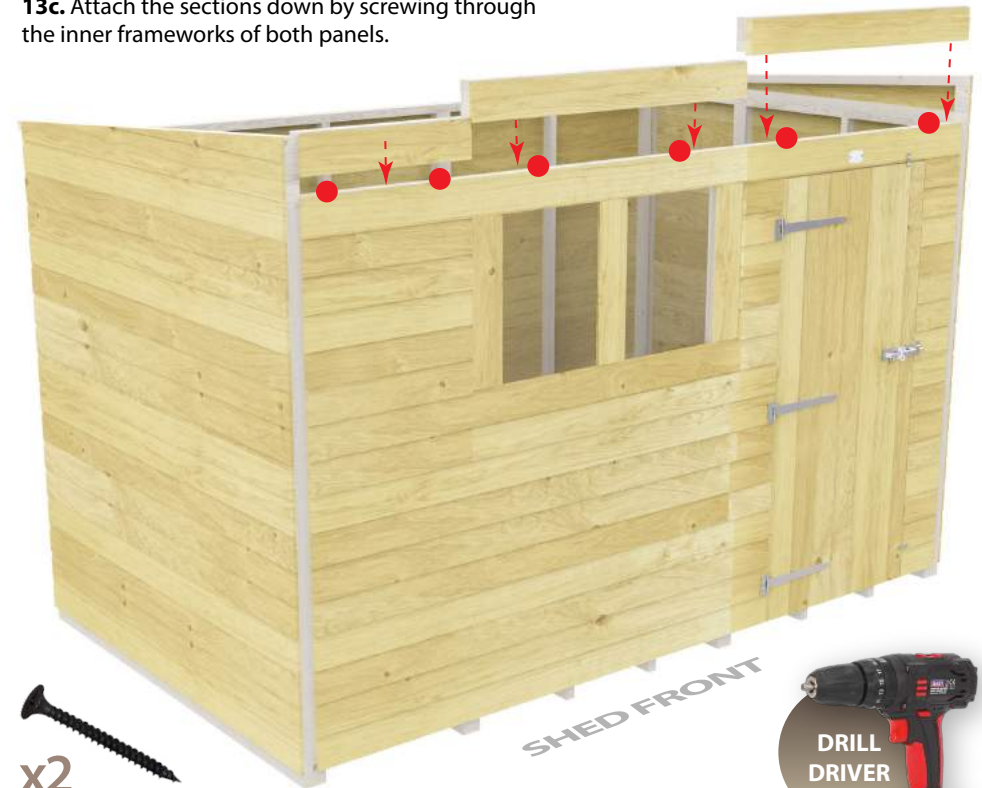

x2
4.0 x 70mm
Per Front Tops



DRILL DRIVER

SIDE & CORNER STRIPS

Hide the panel edges.
Cover the framework & seams.

14a. Use all the side/corner strips to finish off the shed, by covering any exposed framework and the panel joining seams.

14b. Fix the strips down by using 3 screws to secure them to the shed. This will create a nice finish and hide any gaps on the outer walls of framework, front, back and sides.


● = Drill Points using screws provided as shown



DRILL DRIVER



14c. Continue this process along the sides and rear of the shed till you have covered all exposed panel edges and seams.



PENT ROOF PANELS

Place 4x6ft roof section.

Repeat for larger models as shown.

Repeat Steps for 4x6ft Roof Panels as shown below:

8x6ft Repeat x1

10x6ft Repeat x1

12x6ft Repeat x2

14x6ft Repeat x3

16x6ft Repeat x3

18x6ft Repeat x3

20x6ft Repeat x4

15a. Place the 4x6ft roof section in place. Repeat this stage for models as shown below. 2ft roof section will follow last. Shown in Step 16.

15b. Screw the roof panel down as shown in Diagram 15b.

● = Drill Points using screws provided as shown



DRILL DRIVER

2ft ROOF SECTION

Place 2x6ft roof section last.
6x6ft • 6x10ft • 6x14ft • 6x18ft



NOTICE:

8x6ft SKIP Step

12x6ft SKIP Step

16x6ft SKIP Step

20x6ft SKIP Step

Jump to Step 17

16a. Place the 2ft roof section at the far left end of roof if your shed size is a 6ft, 10ft, 14ft & 18ft.

16b. Please note that the roof sections should sit firmly on the top of the front and rear panels and have the same height as the side Pent Angle Tops.

16c. You will notice the gaps in the roof as above. This is normal and will be covered by the roof felt material once applied.



x4
4.0 x 70mm

● = Drill Points using screws provided as shown

DRILL DRIVER

Make final adjustments if required.

NOW DRILL SHED TO THE FLOOR

ATTACH THE ROOF FELT


Use the felt lengths provided.



17a. Apply the roof felt as shown. Apply lower levels first to create correct rain run off positions.

17b. Using a hammer, tack down the felt with the tacks provided in a neat fashion.

17c. Trim down excess felt with a stanley knife. Remember to overlay the 1st felt to avoid rain leaks.

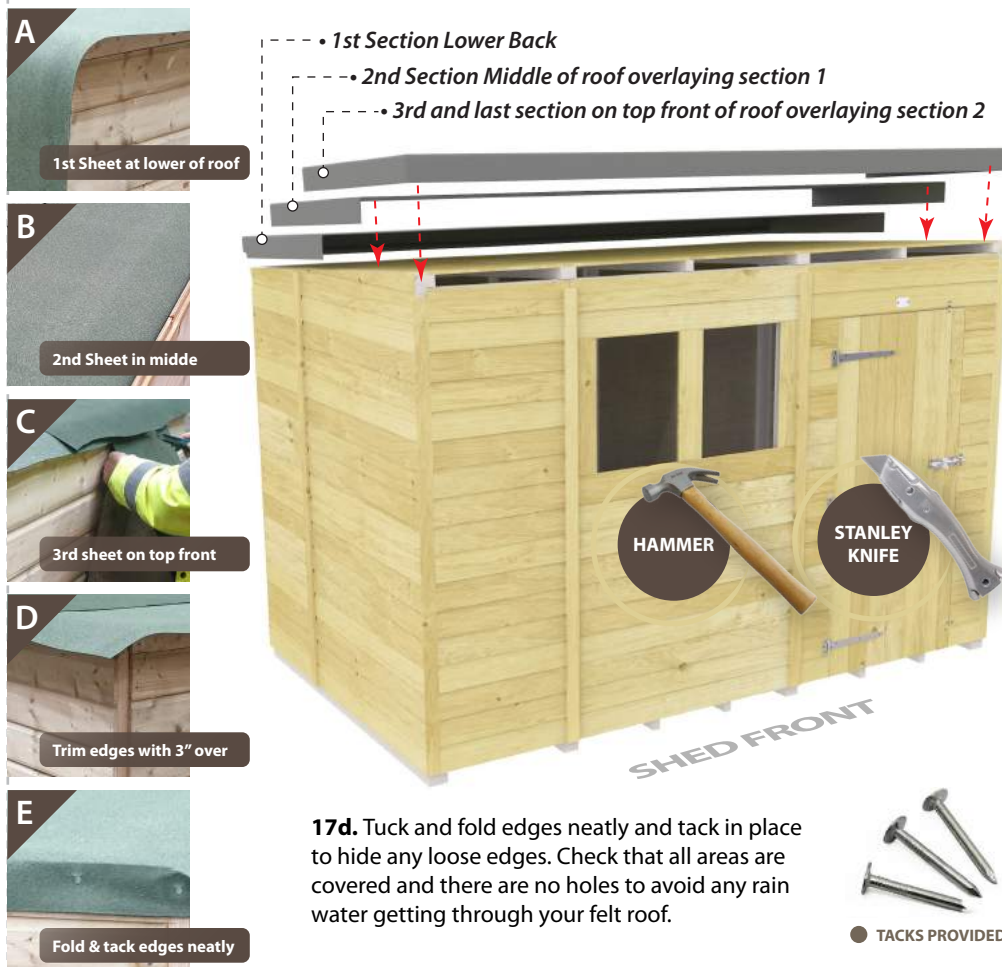

17d. Tuck and fold edges neatly and tack in place to hide any loose edges. Check that all areas are covered and there are no holes to avoid any rain water getting through your felt roof.

ATTACH FELT STRIPS Create the Final Roof Edges. Final steps finishing off the roof.


18a. Using the felt strips provided cover the edges of the roofs and ends of the roof felt. You will need to measure these to fit to your requirements and create the perfect roof finish as shown below.

18b. Drill in the felt strips as shown on front and back of the shed to finish the roof off. Use the framework of the roof blocks to screw the felt strips down to. The felt strips will give your shed a neat finish for the roof and hide any overhang areas of the roof felt.

18c. Felt Strips must be same height as roofing felt to allow rain water to run off. See Diagram on the right.




Note: Felt Strip Positions

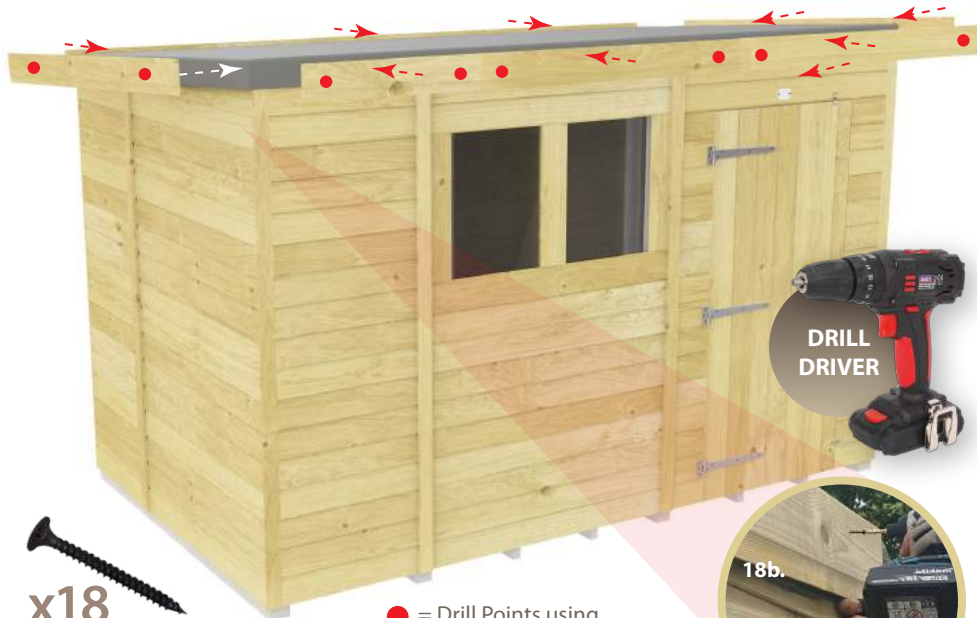

x18
4.0 x 70mm

● = Drill Points using screws provided as shown



18b.

YOUR ALMOST DONE BUILDING YOUR SHED...

DIAMOND CAPS Add the Finishing Touch.

19a. Using the provided Diamond Caps you can create a nice finishing touch to the Pent Shed. This also covers the seam between the Felt Strips and hides any visible joints.

19b. Double check your shed for any loose bits or areas that need further strengthening or additional screws to secure further.

● = Drill Points using screws provided as shown



19a.

x2
4.0 x 70mm

Enjoy Your New Shed.

Congratulations
YOUR FINISHED!



**Pressure Treated
Tanalised Timber for Longer
Lasting Life!**

Total Sheds
28 Charles Street,
Willenhall, WV13 1HG
Tel: 01902 636 529
Email: info@totalsheds.co.uk