

# Bamburgh Planter Table

IMPORTANT, RETAIN FOR FUTURE REFERENCE: READ CAREFULLY.

Check all parts are present prior to assembly.

- Always pre-drill timber to avoid splitting.
- The timber in this product is pressure treated to ensure longevity and protection against rot. This may leave a colour variations, but these will even out as the moisture content stabilises.
- Timber is a natural material and will shrink and swell as a result of varying moisture content.
- Keep all plastic bags and parts away from children.

Technical Help line: 0333 7777 089 8:30am - 5.00pm Monday to Friday

In line with your statutory rights, please check all parts prior to assembly, as assembly of damaged parts may be deemed to be acceptance and this may affect the remedies you are entitled to. If the product is not constructed in accordance with the instructions, or is altered in anyway (e.g. painted), the manufacturer cannot be held liable for any resulting damage.



REQUIRED TOOLS :  
(NOT SUPPLIED)



POZI DRIVE SCREWDRIVER



SPIRIT LEVEL




TAPE MEASURE



HAMMER


PARTS:

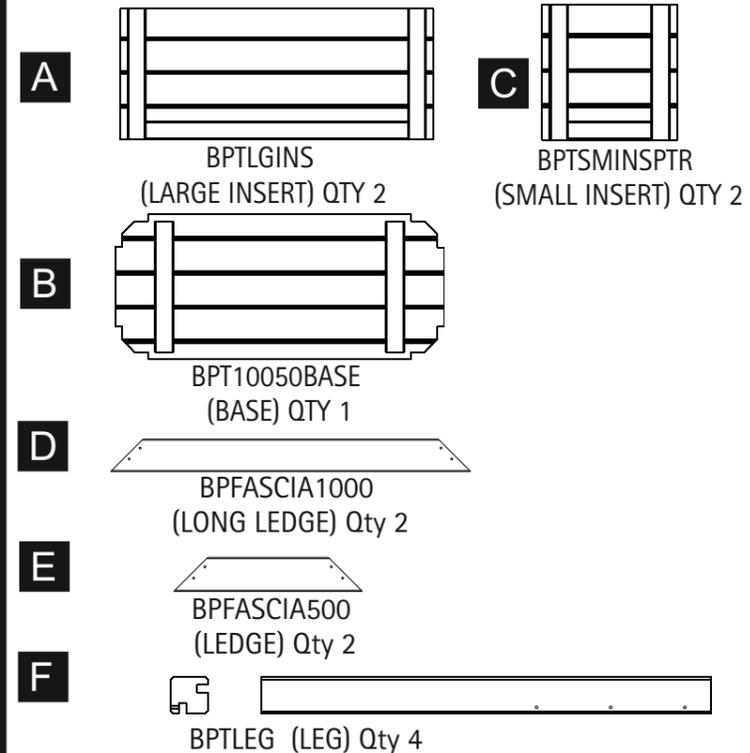

(FIXING PACK) BPTFP


Not to scale

For further information



40mm

Qty 40




50mm


Qty 4



www.forestgarden.co.uk




Qty 24

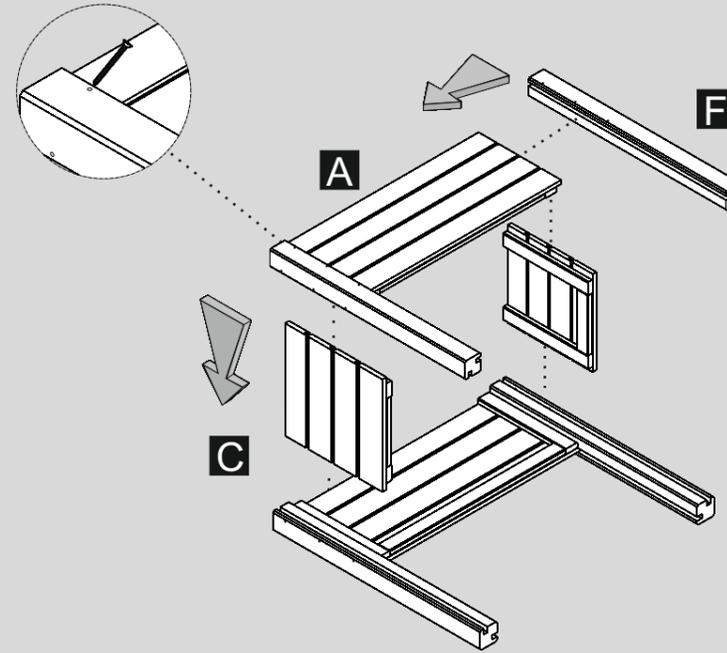

Place a leg on either side of one of the large inserts, making sure that the insert's framework is on the inside and to the bottom, and that it is flush with the top of the leg. Fix each leg in place using 3 x 40mm screws in the pre drilled holes. Repeat for the other side.



Lay one of the completed sides on the ground and place both of the small inserts into the posts. Secure each in place using 3 x 40mm screws using the pre drilled holes.

Place the remaining side onto this and fix using 6 x 40mm screws. Make sure all edges are flush

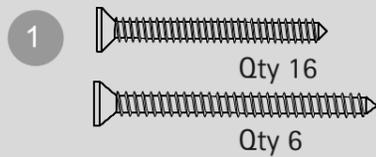

Qty 16

Qty 6

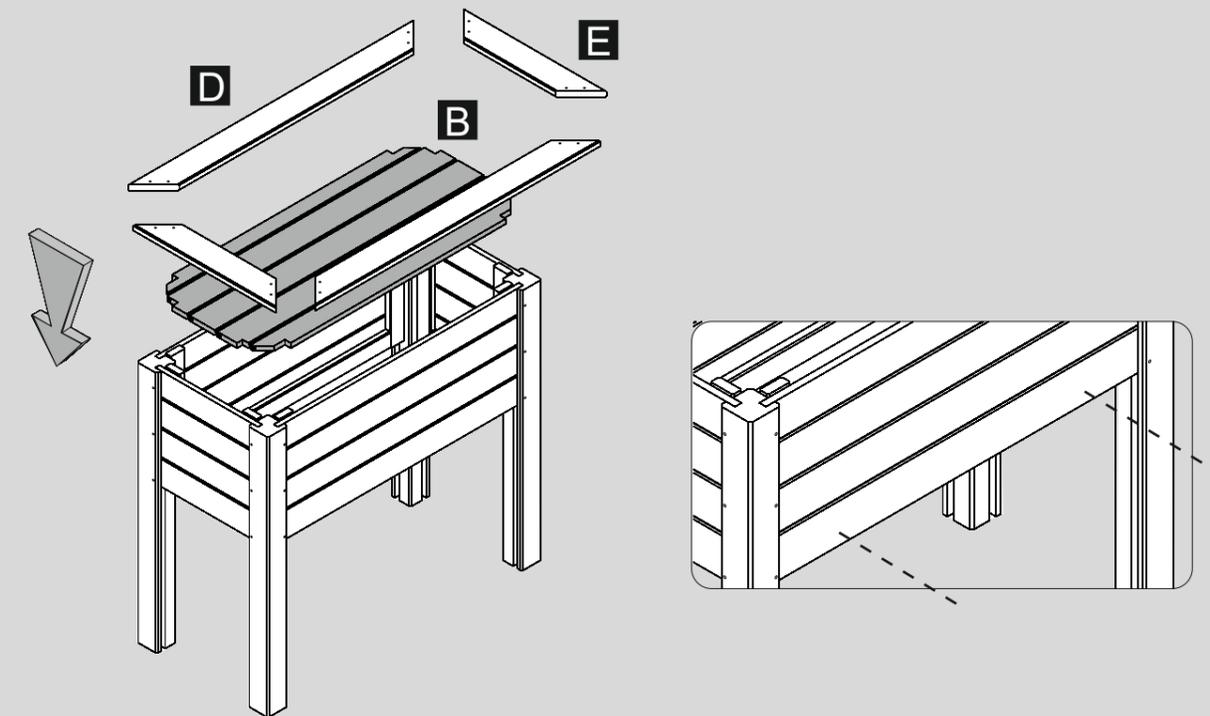

Slot the base into the planter so that it rests on the framework of the sides. Secure this in place by screwing from the outside of the two large sides and into the two battens underneath the base using 2 x 50mm screws for each side. Make sure you pre drill this first.

Place the ledges onto the planter making sure that the corners all meet and that this is flush and level. The ledges should overhang the the posts by approximately 20mm. Secure each ledge, using 4 x 40mm screws in the holes provided.