


### DAUPHIN FOUNTAIN C530 WITH PLUMBING DETAIL

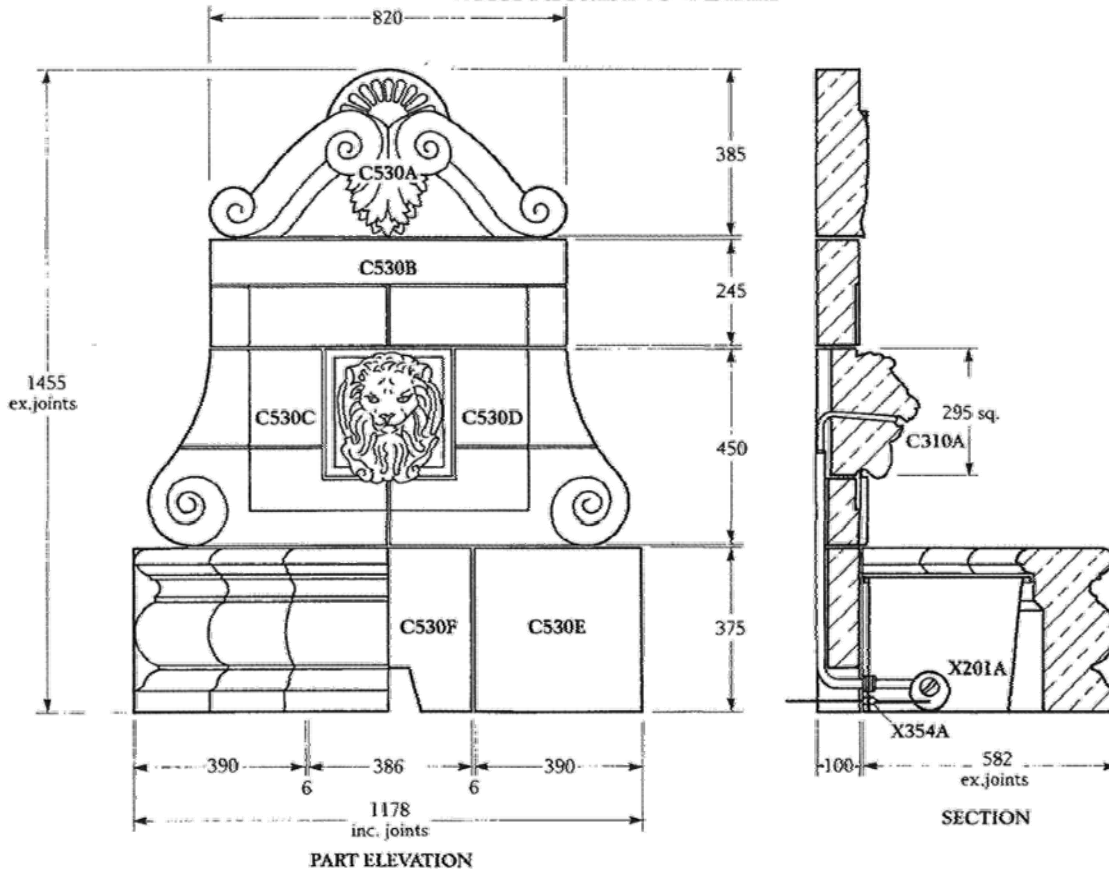

**POINTING** - Joints should be pointed using our proprietary pre-prepared dry mix in accordance with the recommended instructions printed on bags.  
Or use 1:1:6 cement/lime/sand mortar colour-toned to suit (white cement may be necessary).  
**BEDDING JOINTS** - Use 1:1:6 cement/lime/sand mortar

To ease connections, hot water may be used to soften PVC pipes.

To ensure a watertight seal, all threaded joints require the use of PTFE tape (supplied).

This fountain has been designed for positioning in front of a wall, hedge or similar.

For security and additional safety, it is recommended that individual components are fixed together with dowels and/or mechanical fixings.

Consult a qualified electrician to ensure electrical supply conforms with all regulations/codes.

Unless otherwise stated, all materials other than stonework to be supplied by others.

#### PLUMBING COMPONENT LISTING X301A

Valve 16mm (optional)	x1
Tank connector 1/2" BSP	x1
Socket 1/2" BSP	x2
Hose tail 1/2" BSP x16mm	x2
Reducing connector	x1
Clear 1/2" PVC pipe (to be cut on site by others)	

COMPONENT LISTING	WEIGHTS
	each
C530A Top scroll	41kg x1
C530B Top block	38kg x1
C530C Left hand block	33kg x1
C530D Right hand block	33kg x1
C530E Outer base block	29kg x2
C530F Centre base block	27kg x1
C530G Pool section	50kg x4
C310A Lion wall fountain	15kg x1
X201A Pump	
X475A Liner	
X301A Plumbing	
X354A Cable gland	

Allow 6mm for vertical and bedding joints.