

# Honeysuckle Arch

ISSUE 0314

IMPORTANT: RETAIN FOR FUTURE REFERENCE: READ CAREFULLY.

- Always pre-drill timber to avoid splitting.
- The timber in this product is pressure treated to ensure longevity and protection against rot. This may leave colour variations, but these will even out as the moisture content stabilises.
- Timber is a natural material and will shrink and swell as a result of varying moisture content.
- Keep all plastic bags and parts away from children.
- This product is not intended for use by children. Do not climb.
- We recommend you anchor the legs in the ground or use post supports.

Technical Help line: 0333 7777 089 8:30am - 5.00pm Monday to Friday

In line with your statutory rights, please check all parts prior to assembly, as assembly of damaged parts may be deemed to be acceptance and this may affect the remedies you are entitled to. If the product is not constructed in accordance with the instructions, or is altered in anyway (e.g. painted), the manufacturer cannot be held liable for any resulting damage.

**Maintenance:**

Regularly check that all fixings are tight and secure and the product has no protruding sharp edges or splinters.


Important : Assembly of this arbour requires a minimum of two adults.




REQUIRED TOOLS:  
(NOT SUPPLIED)



PARTS:

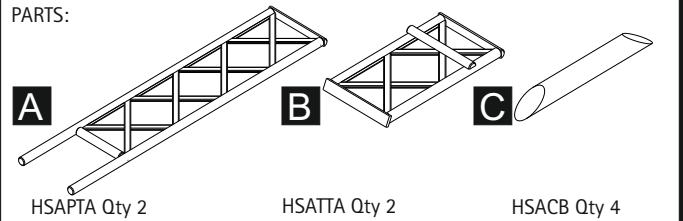

Fixing Pack Contents (HSFP) :

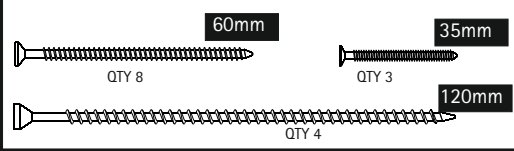

For further information



www.forestgarden.co.uk

**1**

Place the roof sections (HSATTA) together as shown. Secure together using 3x35mm screws.

This article contains biocidal products to give protection against wood destroying insects & wood rotting fungi. Contents may vary. May contain : Basic copper carbonate (Copper (II) carbonate – Copper (II) hydroxide (1:1), Cupric oxide, Copper hydroxide carbonate, oxyethyl, ammoniumpropionate, Copper HDO, Propiconazole, Tebuconazole, Boric acid, Benzalkonium chloride. Wear gloves when handling freshly treated wood. Avoid breathing dust when cutting treated or untreated wood. Dispose of off-cuts responsibly – do not burn.

**2**

Place the roof assembly onto the two sides (HSAFTA). Secure through the large logs on the roof section into the top of the post trellis using 2x120mm screws each side.

**2**

Position the angled braces (HSACB) as shown. Secure using 2x60mm screws per brace.

**ATTENTION:**

Take care not to trap fingers whilst assembling the product